

FORM PTO-1390  
(REV 10-97)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

DATE: March 23, 1999

EXPRESS MAIL LABEL NO.  
EM395347374USATTORNEY DOCKET NO.  
34248/DBPU.S. APPLICATION NO.  
To Be Assigned **09/147970**INTERNATIONAL APPLICATION NO.  
**PCT/DE97/02363**INTERNATIONAL FILING DATE  
**7-October-1997**PRIORITY DATE CLAIMED  
**7-October-1996**

## TITLE OF INVENTION

**METHOD FOR TRANSMITTING DATA IN A TELECOMMUNICATIONS NETWORK AND SWITCH FOR IMPLEMENTING SAID METHOD**

## APPLICANT(S) FOR DO/EO/US

**SCHINDLER Sigrum; ILLG Andreas; LÜDTKE Karsten; and PAETSCH Frank**

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2)).
  - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/LUS).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).
  - a. ☒ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
8. ☒ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☒ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

**Items below concern other document(s) or other information included:**

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A FIRST preliminary amendment.  
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Small entity claim with a copy of this transmittal letter attached.
17. ☒ International search report.
18. ☒ International preliminary examination report.
19. ☒ Extra set of drawings
20. ☒ Letter re Correction to Drawings
21. ☒ English Translation of FIGS. 5a and 5b

U.S. APPLICATION NO. (If known, see 37 CFR 1.5) To Be Assigned		INTERNATIONAL APPLICATION NO. PCT/DE97/02363		ATTORNEY DOCKET NO. <b>34248/DBP</b>	
<input checked="" type="checkbox"/> The following fees are submitted: (see Note (1) below) <b>Basic National Fee (37 CFR 1.492(a)(1)-5)):</b> Search Report has been prepared by the EPO or JPO ..... <b>\$ 840.00</b> International preliminary examination fee paid to USPTO (37 CFR 1.482) ..... <b>\$ 670.00</b> No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) ..... <b>\$ 760.00</b> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... <b>\$ 970.00</b> International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) ..... <b>\$ 96.00</b>  <b>ENTER APPROPRIATE BASIC FEE AMOUNT = \$ 840.00</b>				<b>CALCULATIONS</b>	<b>PTO USE ONLY</b>
Surcharge of <b>\$130</b> for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492(e)). <input type="checkbox"/> 20 <input type="checkbox"/> 30				\$	
<b>Claims</b>	<b>Number Filed</b>	<b>Number Extra</b>	<b>Rate</b>		
Total Claims	<b>21+4 -20=</b>	<b>5</b>	<b>X \$18</b>	\$	<b>90.00</b>
Independent Claims	<b>2 -3=</b>	<b>0</b>	<b>X \$78</b>	\$	<b>0.00</b>
Multiple dependent claim(s) (if applicable)			<b>+ \$260</b>	\$	<b>260.00</b>
<b>TOTAL OF ABOVE CALCULATIONS =</b>				\$	<b>1,190.00</b>
Reduction by 1/2 for filing by small entity, if applicable. Verified Small entity statement must also be filed. (Note 37 CFR 1.9, 1.27, 1.28).				\$	<b>595.00</b>
<b>SUBTOTAL =</b>				\$	<b>595.00</b>
Processing fee of <b>\$130</b> for furnishing the English translation later than months from the earliest claimed priority date (37 CFR 1.492(f)). <input type="checkbox"/> 20 <input type="checkbox"/> 30				\$	
<b>TOTAL NATIONAL FEE =</b>				\$	<b>595.00</b>
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). <b>\$40.00</b> per property				\$	
<b>TOTAL FEES ENCLOSED =</b>				\$	<b>595.00</b>
<b>Note (1): The basic national fee must be paid when filing this application. The 20-month time limit (37 CFR § 1.494) and 30-month time limit (37 CFR § 1.495) are not extendable.</b>				Amount to be: refunded	\$
				charged	\$
<p>a. <input checked="" type="checkbox"/> A check in the amount of <b>\$ 595.00</b> to cover the above fees is enclosed.</p> <p>b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.</p> <p>c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>03-1728</u>. A duplicate copy of this sheet is enclosed.</p> <p><b>NOTE (2): Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.</b></p> <p>SEND ALL CORRESPONDENCE TO:</p> <p><b>D. Bruce Prout</b>  <b>CHRISTIE, PARKER &amp; HALE</b>  <b>P.O. Box 7068</b>  <b>Pasadena, CA 91109-7068</b></p> <p style="text-align: right;">By <u><i>D Bruce Prout</i></u>  <b>D. Bruce Prout</b>  <b>Reg. No. 20,958</b></p>					

PATENT

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

*This paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" under 37 CFR § 1.10 Mailing Label No. EL280433895US.*

Applicant : Sigram Schindler et al.  
Application No. : 09/147,970  
Filed : March 23, 1999  
Title : METHOD FOR TRANSMITTING DATA IN A  
TELECOMMUNICATIONS NETWORK AND SWITCH FOR  
IMPLEMENTING SAID METHOD  
  
Grp./Div. : Unknown  
Examiner : Unknown  
  
Docket No. : 34248/DBP/M521

**REQUEST FOR APPROVAL OF DRAWING CHANGE**

Assistant Commissioner for Patents  
Washington, D.C. 20231

Post Office Box 7068  
Pasadena, CA 91109-7068  
April 30, 1999

Commissioner:

Please amend Fig. 2 as indicated to indicate a plurality of IP switches 10 in the attached redlined drawing.

Please replace Fig. 5A and Fig. 5B with the enclosed new Figures 5A and 5B. English translation for the text of the Figures 5A and 5B have been incorporated therein to aid with examination.

Enclosed herewith are two copies of Figures 2, 5A and 5B, showing in red the proposed changes. It is requested that these

Application No. 09/147,970

drawing changes be reviewed and approved by the Examiner. Applicant will formalize the drawings after allowance of the application.

Respectfully submitted,

CHRISTIE, PARKER & HALE, LLP

By J. Edwin Jeon  
J. Edwin Jeon  
Reg. No. 43,693  
626/795-9900

DBP/sfc

Enclosures: Two copies of drawings FIGs. 2, 5A, 5B

AJD PAS183712.1-\*4/30/99 5:52 pm

09/147970

510 Rec'd PCT/PTO

23 MAR 1999  
PATENT

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

*This paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" under 37 CFR § 1.10 Mailing Label No. EM395347374US.*

Applicant : Sigram Schindler et al.  
Application No. : To Be Filed  
Filed : To Be Filed  
Title : METHOD FOR TRANSMITTING DATA IN A  
TELECOMMUNICATIONS NETWORK AND SWITCH FOR  
IMPLEMENTING SAID METHOD  
  
Grp./Div. : Unknown  
Examiner : Unknown  
  
Docket No. : 34248/DBP/M521

**LETTER RE CORRECTION TO DRAWINGS**

Assistant Commissioner for Patents Post Office Box 7068  
Washington, D.C. 20231 Pasadena, CA 91109-7068  
March 22, 1999

Commissioner:

Please amend FIG. 2 by adding --PRIOR ART-- as indicated in the attached redlined drawing.

Respectfully submitted,

CHRISTIE, PARKER & HALE, LLP

By

D. Bruce Prout  
D. Bruce Prout  
Reg. No. 20,958  
626/795-9900

DBP/sfc

SFC PAS177706.1-\* -3/22/99 4:35 pm

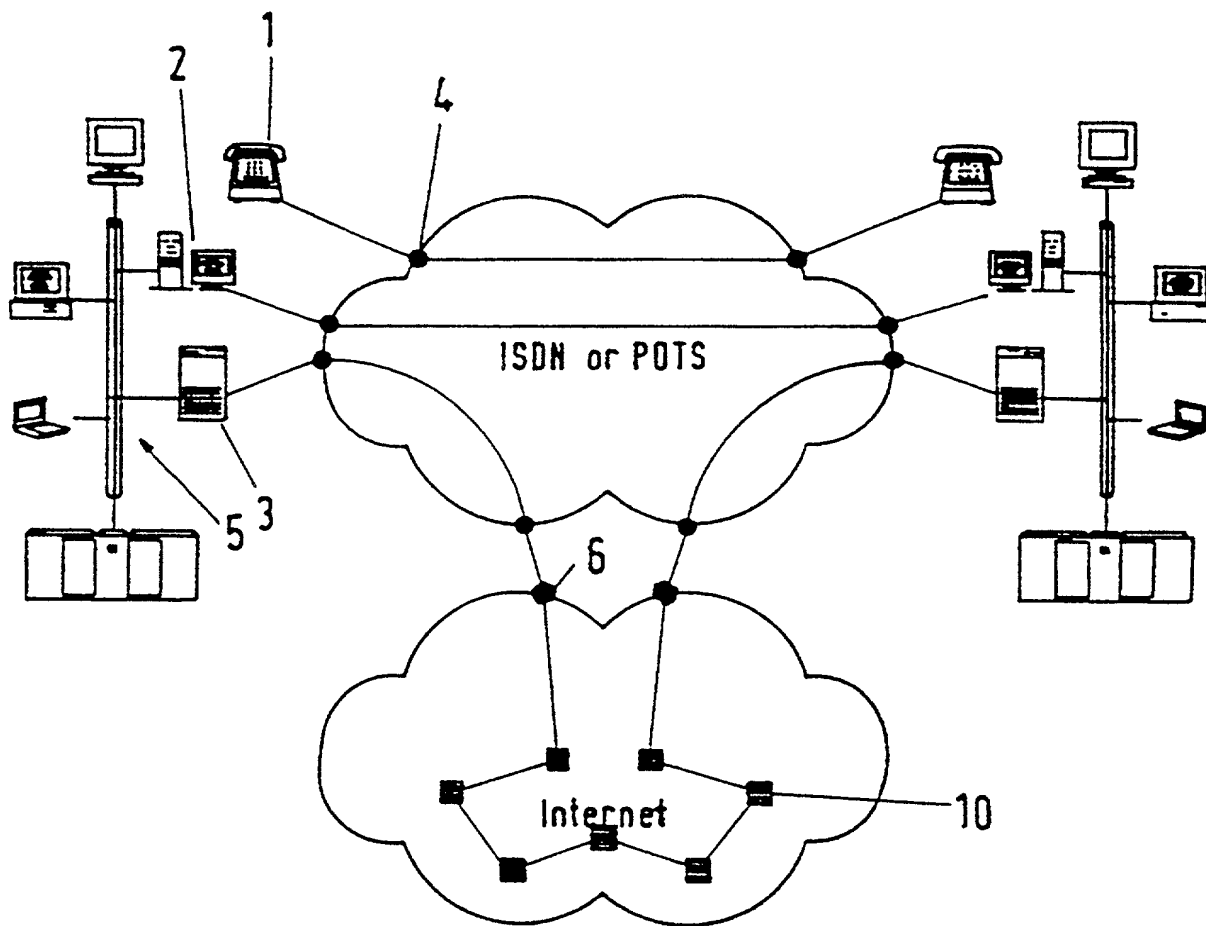


Fig.2

PRIOR ART

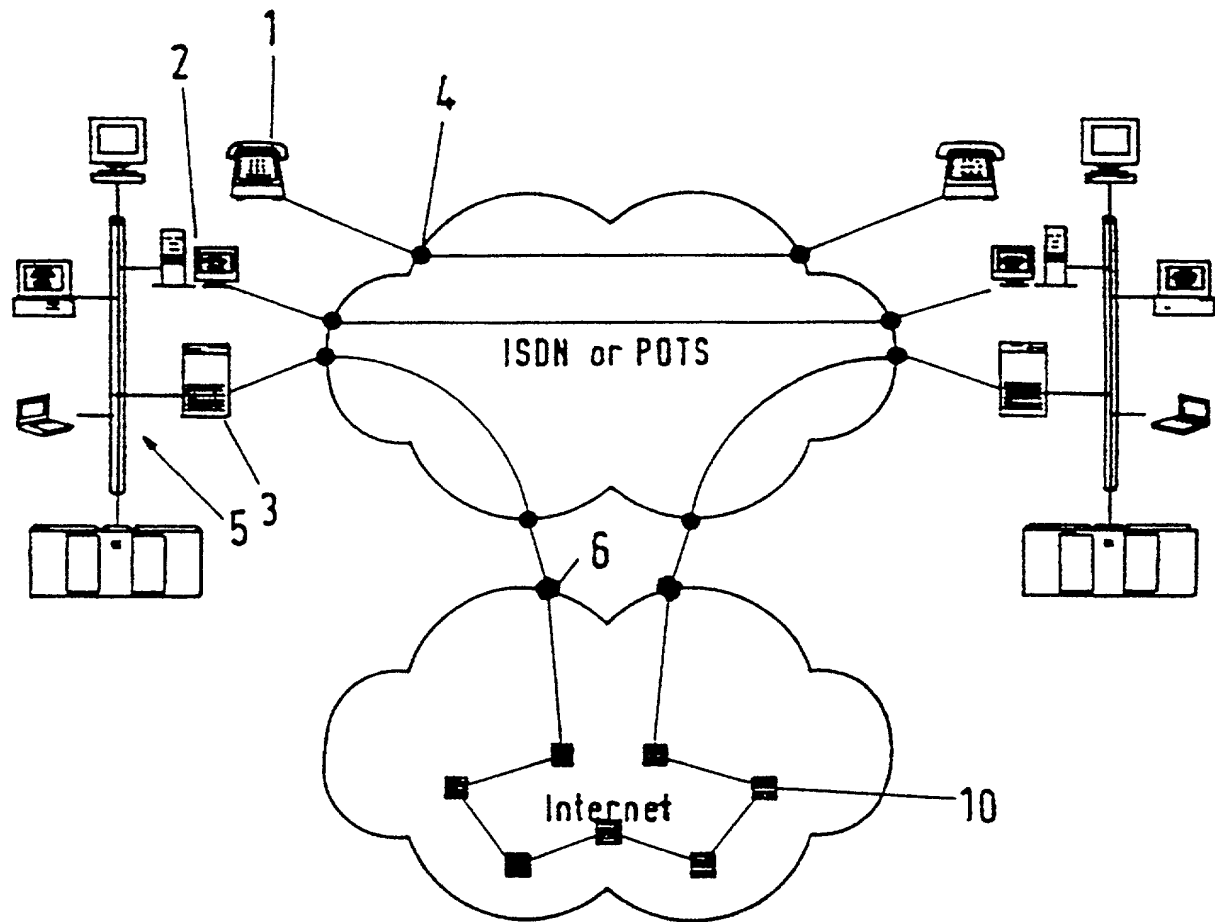


Fig.2

**Docket No.** : 34248/DBP/M521 CHRISTIE, PARKER & HALE, LLP  
 Applicant or Patentee : Sigrum SCHINDLER et al. Post Office Box 7068  
**Application or Patent No.** : To Be Assigned Pasadena, CA 91109-7068  
 Filed or Issued : To Be Assigned (626) 795-9900  
**Entitled** : METHOD FOR TRANSMITTING DATA IN A TELECOMMUNICATIONS  
 NETWORK AND SWITCH FOR IMPLEMENTING SAID METHOD

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS  
 (37) CFR 1.9(f) & 1.27(c) - SMALL BUSINESS CONCERN**

I hereby declare that I am

\_\_\_\_\_ the owner of the small business concern identified below:

X an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF SMALL BUSINESS CONCERN : Teles AG Informationstechnologien

ADDRESS OF SMALL BUSINESS CONCERN: Doverstraße 2-4, 10587 Berlin, Germany

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 CFR 121.12, and reproduced in 37 CFR 1.9(d), for the purposes of paying reduced fees to the United States Patent and Trademark Office, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention entitled **METHOD FOR TRANSMITTING DATA IN A TELECOMMUNICATIONS NETWORK AND SWITCH FOR IMPLEMENTING SAID METHOD** by inventor(s) Sigrum SCHINDLER, Andreas ILLG, Karsten LÜDTKE, and Frank PAETSCH described in

X the specification filed herewith

\_\_\_\_\_ Application No. \_\_\_\_\_ filed \_\_\_\_\_

\_\_\_\_\_ Patent No. \_\_\_\_\_ issued \_\_\_\_\_

If the rights held by the above identified small business concern are not exclusive, each individual, concern or organization having rights in the invention is listed below\* and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e). \*NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

NAME :

ADDRESS :

\_\_\_\_\_ INDIVIDUAL

\_\_\_\_\_ SMALL BUSINESS CONCERN

\_\_\_\_\_ NONPROFIT ORGANIZATION



**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS**  
**(37 CFR 1.9(f) & 1.27(c) - SMALL BUSINESS CONCERN**

**Docket No.: 34248/DBP/M521**

NAME :

ADDRESS :

☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING : Prof. Dr.-Ing. Sigrun Schindler, Dr. Stefan Jiraneck  
TITLE OF PERSON IF OTHER THAN OWNER : CEO COO  
ADDRESS OF PERSON SIGNING : Inselstr. 24, 14129 Berlin ; Eberfeldstr. 24a  
14612 Falkensee

SIGNATURE

*Schindler*


*S. Jiraneck*

DATE

17.3.99

DBP/sfc

::ODMA\SOFTSQL\G11\CPHPA81175601\0



07 Rec'd PCT/PTO 30 APR 1999

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

*This paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" under 37 CFR § 1.10 Mailing Label No EL280433895US.*

Applicant : Sigram Schindler et al.  
Application No. : 09/147,970  
Filed : March 23, 1999  
Title : METHOD FOR TRANSMITTING DATA IN A  
TELECOMMUNICATIONS NETWORK AND SWITCH FOR  
THE IMPLEMENTATION OF THE METHOD  
  
Grp./Div. : Unknown  
Examiner : Unknown  
  
Docket No. : 34248/DBP/M521

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents  
Washington, D.C. 20231

Post Office Box 7068  
Pasadena, CA 91109-7068  
April 30, 1999

Commissioner:

Please amend the above-identified application as follows:

IN THE CLAIMS

Please amend claims 1-21 as follows:

- 1 1. (Amended) A method [Method] for transferring data from an  
2 end terminal, from a first switch to a second switch which are part  
3 of a line-switching network managed by a network management system  
4 or have access to the [a] line-switching network, selectively by  
5 line-switching or packet-switching, comprising [consisting of] the  
6 [following] steps of:
  - 7 a) establishing a connection through the line-switching  
8 network from the [a] first switch to an access point of  
9 a packet-switching network;

- b) line-switching transferring [transfer] of data through said connection from the first switch to the access point of the packet-switching network;
- c) packeting of the data into data packets if [this does] the data do not yet exist as data packets, and packet-switching transferring [transfer] of the data packets through the packet-switching network from the access point to the second switch;
- d) checking repeatedly [repeated checks] whether a control signal exists which is triggered by [the] a user of the [an] end terminal or the network management system for changing-over [transferring] to a line-switching connection to the second switch;
- e) establishing the [a] line-switching connection, during an existing transfer, from the first switch to the second switch through the line-switching network with a [the] presence of [a corresponding] the control signal, if [this] the line-switching connection is not yet present;
- f) changing-over to a line-switching data transfer during the existing [connection] transfer and transferring data over the line switching connection to the second switch.

2. (Amended) A method [Method] for transferring data from an end terminal, from a first switch to a second switch both of which are [both] part of a line-switching network and a packet-switching network, both managed by a network management system, and have access to such networks, selectively through line-switching or through packet-switching, comprising [consisting of] the [followings] steps of:

- a) packeting the data into data packets in the first switch if the data does not yet exist as data packets;

- 10           b)   packet-switching transferring [transfer] of the data  
11           packets through the packet-switching network to the  
12           second switch;  
13           c)   checking repeatedly [repeated checking] whether a control  
14           signal exists which is triggered [released] by a [the]  
15           user of the [an] end terminal or [a] the network  
16           management system for transferring to a line-switching  
17           connection to the second switch;  
18           d)   establishing the [a] line-switching connection, during an  
19           existing transfer, through the line-switching network to  
20           the second switch with [the] a presence of [a  
21           corresponding] the control signal, if [this] the line-  
22           switching connection is not yet present;  
23           e) [f)] changing-over [change] to a line-switching data  
24           transfer during the existing [connection] transfer  
25           and transferring data over the line switching  
26           connection to the second switch.

1           3.    (Amended) The method [Method] according to claim 1 or 2  
2           wherein the data packets after changing over to [a] the line-  
3           switching data transfer remain as data packets and are transferred  
4           as such by line-switching.

1           4.    (Amended) The method [Method] according to claim 1 or 2  
2           wherein the data packets after changing to [a] the line-switching  
3           data transfer are unpacketed, more particularly [the] headers of  
4           the data packets are removed.

1           5.    (Amended) The method [Method] according to claim 1 [at  
2           least one of claims 1, 3 or 4] wherein a [the] same data channel is  
3           used to send the data packets to the access point to the packet-  
4           switching network and to transfer the data through the line-  
5           switching network to the second switch.

1           6.    (Amended) The method [Method] according to claim 1 [at  
2   least one of claims 1, 3 or 4] wherein data packets are transferred  
3   to the access point to the packet-switching network through a first  
4   data channel and the data are transferred for line-switching to the  
5   second switch through a second data channel.

1           7.    (Amended) The method [Method] according to claim 1 or 2  
2   [at least one of the preceding claims] wherein the line-switching  
3   network is an ISDN network [with] having ISDN switches, the data  
4   packets have [the format] a TCP/IP format and [the] data channels  
5   used for the line-switching data transfer [represent] are ISDN B  
6   channels.

1           8.    (Amended) The method [Method] according to claim 1 or 2  
2   [at least one of the preceding claims] wherein the control signal  
3   which [releases] triggers a change-over [change] between the line-  
4   switching transfer and the packet-switching transfer [on  
5   understepping or exceeding certain demands on the quality of the  
6   data transfer such as time delay or noise proportion,] is produced  
7   automatically when demands on a quality of a data transfer such as  
8   a time delay or a noise proportion is understepped or exceeded, or  
9   produced as a result of a command of [a] the network management  
10   system or [an] the end terminal [appliance].

1           9.    (Amended) The method [Method] according to claim 1 [at  
2   least one of the preceding claims] wherein, with [a] the line-  
3   switching data transfer between the first switch and the second  
4   switch or between the first switch and the access point to the  
5   packet-switching network, the data of several users are multiplexed  
6   on one data channel by forming sub-channels of a fixed bandwidth  
7   [band width].

1           10. (Amended) The method [Method] according to claim 9  
2 wherein the data of [one] the user [after its selection] when line-  
3 switching is selected, are transferred line-switched with a  
4 transfer rate which corresponds to a fraction of the transfer rate  
5 of a [the] bandwidth [band width] which is available as standard to  
6 the user.

1           11. (Amended) The method [Method] according to claim 9 or 10  
2 wherein the line-switching [line-switched] network is an ISDN  
3 network and the data of [one] the user to be transferred are  
4 transferred between the first and the second switches or between  
5 [one] the first switch and the access point to the packet-switching  
6 network on [one] a data channel with a bandwidth [band width] which  
7 [corresponds to] is only a fraction of a standard [the] bandwidth  
8 [band width] of 64 kbit/s [which is available as standard], more  
9 particularly 32, 16, 8, 4, 2 or 1 kbit/s.

1           12. (Amended) The method [Method] according to claim 11  
2 wherein, in the first switch, only [each] every n-th byte or every  
3 [each] n-th bit of an ISDN frame is copied over and forwarded on  
4 [the] a [switched-through] data channel to the [next] second switch  
5 or to [an] the access point to the packet-switching network,  
6 whereby an effective [the] bandwidth [band width] of the line-  
7 switching data transfer is [64 kbit/s /n] (64/n) kbit/s.

1           13. (Amended) The method [Method] according to Claim 1 or 2  
2 [at least one of the preceding claims] wherein, with a data  
3 transfer from the first switch changing over [a change-over] from  
4 a packet-switching data transfer to [a] the line-switching data  
5 transfer,

- 6           a) an [the] address information of the data packets are  
7 evaluated and classified according to a network  
8 topology[;], and

- 9           b)    for the data packets whose destination addresses [relate]  
10               correspond to [the] a same topological area of the  
11               network [a] , the second switch is selected which is  
12               located in [this] the same topological area[;]  
13           (c)   a line-switching connection (bypass) is established with  
14               the selected switch, and]  
15           (d)   the corresponding data or data packets are transferred  
16               line-switched to the switch].

1           14. (Amended) The method [Method] according to claim 13  
2           wherein, [characterized in that] to classify the data packets  
3           according to the network topology, the destination addresses of the  
4           data packets are sorted according to geographical areas whereby,  
5           for data packets whose destination addresses correspond [relate] to  
6           [the] a same geographical area, [a] the second switch is selected  
7           [which is] to be located in this geographical area [and a line-  
8           switching connection is established with this switch].

1           15. (Amended) The method [Method] according to claim 14  
2           [characterized in that] wherein, for classifying the data packets  
3           according to geography, the destination addresses are compared with  
4           destination addresses stored in a data bank [whereby the data band]  
5           which contains a link between the destination addresses and [the]  
6           associated [geographic situation] geographical areas.

1           16. (Amended) [Method according to at least one of the  
2           preceding claims wherein in corresponding manner during an existing  
3           connection a change is made between a line-switching and a packet-  
4           switching transfer.] The method according to claim 1, when the data  
5           is being transferred using the line-switching data transfer,  
6           further comprising the steps of:

- 7               a)   checking repeatedly whether a second control signal  
8               exists which is triggered by the user of the end terminal or

9        the network management system for changing-over to a packet-  
10        switching data transfer to the second switch;

11        b)        establishing a second connection through the line-  
12        switching network, during the existing transfer, from the  
13        first switch to the access point of the packet-switching  
14        network with a presence of the second control signal, if the  
15        connection to the access point is no longer present;

16        c)        changing-over to a packet-switching data transfer  
17        during the existing transfer;

18        d)        line-switching transferring of the data through the  
19        connection or the second connection from the first switch to  
20        the access point; and

21        e)        packeting of the data into data packets if the data  
22        does not yet exist as data packets, and packet-switching  
23        transferring of the data packets through the packet switching  
24        network from the access point to the second switch.

1        17. (Amended) A switch [Switch] for use in a method according  
2        to claim [claims] 1 or 2, [with] comprising: a control device; at  
3        least one packeting device [(713, 714)] for packeting and  
4        unpacketing data[,]; a packet switching device [(72)] for routing  
5        data packets; and a line-switching device [(73)] for establishing  
6        connections of data channels, [characterized by] wherein [a] the  
7        control device [(71) which] directs incoming data either to the  
8        packet switching device [(72)] or to the line switching device  
9        [(73)] depending [in dependence] on the control [signals] signal  
10        [of a] triggered by the user of [an] the end terminal or the [a]  
11        network management system.

1        18. (Amended) The switch [Switch] according to claim 17  
2        [characterized in that] further comprising a topology data bank  
3        [(75) is provided\_which contains] containing associations between



4 destination addresses of the data packets and associated  
5 geographical areas [origin].

1 19. (Amended) The switch [Switch] according to claim 17 [or  
2 18] further comprising [characterized in that furthermore] a  
3 multiplexer [(732) is provided] which, with the presence of a  
4 corresponding control command, multiplexes several data streams so  
5 that only [each] every n-th bit and/or [each] every n-th byte is  
6 used in [the] an outgoing data channel.

1 20. (Amended) The switch [Switch] according to claim 19  
2 [characterized in that] wherein different input data streams occupy  
3 different sized proportions in the outgoing data channel.

1 21. (Amended) The switch [Switch] according to claim 17  
2 further comprising [one of claims 17 to 20 characterized in that in  
3 addition] a device [(721) is provided] for compressing and  
4 decompressing data.

Please add the following new claims:

1 -- 22. The method according to claim 2 wherein, with the line-  
2 switching data transfer between the first switch and the second  
3 switch, the data of several users are multiplexed on one data  
4 channel by forming sub-channels of a fixed bandwidth. --

1 -- 23. The method according to claim 22 wherein the data of the  
2 user when line-switching is selected, are transferred line-switched  
3 with a transfer rate which corresponds to a fraction of the  
4 transfer rate of a bandwidth which is available as standard to the  
5 user. --

1    --    24. The method according to claim 22 or 23 wherein the line-  
2    switching network is an ISDN network and the data of the user to be  
3    transferred are transferred between the first and the second  
4    switches on a data channel with a bandwidth which is only a  
5    fraction of a standard bandwidth of 64 kbit/s, more particularly  
6    32, 16, 8, 4, 2 or 1 kbit/s. --

1    --    25. The method according to claim 24 wherein, in the first  
2    switch, only every n-th byte or every n-th bit of an ISDN frame is  
3    copied over and forwarded on a data channel to the second switch,  
4    whereby an effective bandwidth of the line-switching data transfer  
5    is  $(64/n)$  kbit/s. --

1    --    26. The method according to claim 2, when the data is being  
2    transferred using the line-switching data transfer, further  
3    comprising the steps of:

4           a) checking repeatedly whether a second control signal  
5    exists which is triggered by the user of the end terminal or the  
6    network management system for changing-over to a packet-switching  
7    data transfer to the second switch;

8           b) changing-over to a packet-switching data transfer  
9    during the existing transfer with a presence of the second control  
10   signal; and

11          c) packeting the data into data packets in the first  
12   switch if the data does not yet exist as data packets, and packet-  
13   switching transferring of the data packets through the packet-  
14   switching network to the second switch. --

1    --    27. A switch comprising:

2           a control device;

3           at least one packeting device for packeting and  
4   unpacketing data;

5           a packet switching device for routing data packets; and

6 a line-switching device for establishing connections of  
7 data channels,

8 wherein a control device directs incoming data either to  
9 the packet switching device or to the line switching device  
10 depending on a control signal triggered by a user of an end  
11 terminal or a network management system. --

1 -- 28. The switch according to claim 27 further comprising a  
2 topology data bank containing mapping information between  
3 destination addresses of the data packets and geographical areas.  
4 --

5 -- 29. The switch according to claim 27 or 28, further  
6 comprising a multiplexer, wherein the incoming data comprise  
7 several input data streams and the multiplexer, responding to a  
8 presence of a control command, multiplexes said several input data  
9 streams so that only every n-th bit and/or every n-th byte of each  
10 one of said several input data streams is used in an outgoing data  
11 channel. --

1 -- 30. The switch according to claim 29 wherein the multiplexer  
2 assigns differently sized proportions in the outgoing data channel  
3 to different ones of said several input data streams. --

1 -- 31. The switch according to claim 27 or 28 further comprising  
2 a device for compressing and decompressing the data packets. --

#### REMARKS

Claims 1-21, as amended, remain in this application. Claims  
22-31 have been added. Figures 2, 5A and 5B have been amended.  
It is respectfully requested that the foregoing Preliminary  
Amendment be entered prior to examination.

Application No. 09/147,970

Amendments have been made to the specification. Due to the number of amendments, a substitute specification pursuant to 37 CFR § 1.125 and MPEP § 608.01 (q) is submitted herewith to facilitate the prosecution of this application. The substitute specification is accompanied by a copy of the original specification as filed with the annexes incorporated therein and a compare document showing the changes between the original specification and the substitute specification. The substitute specification does not contain any new matter and includes the same changes as are indicated in the compare copy. Applicant respectfully requests that the substitute specification be entered in this case.

In view of the foregoing amendments and remarks, consideration and allowance of this application are respectfully requested.

Respectfully submitted,

CHRISTIE, PARKER & HALE, LLP

By J. Edwin Jeon  
J. Edwin Jeon  
Reg. No. 43,693  
626/795-9900

JEJ/jej

Enclosures: Specification as filed (with annexes incorporated)  
Substitute Specification  
Compare Document

DJP PAS180337.1--4/30/99 4:49 pm

APR 5 1999

Applicant : Sigram Schindler et al.  
Application No : 09/147,970  
Filed : March 23, 1999  
Title : METHOD FOR TRANSMITTING DATA IN A  
TELECOMMUNICATIONS NETWORK AND SWITCH  
FOR IMPLEMENTING SAID METHOD  
Docket No. : 34248/DBP/M521

## SUBSTITUTE SPECIFICATION



1 34248/JEJ/M521

METHOD FOR TRANSMITTING DATA IN A TELECOMMUNICATIONS NETWORK  
AND SWITCH FOR IMPLEMENTING SAID METHOD

5

BACKGROUND OF THE INVENTION

The invention relates to a method for transferring data from a first switch to a second switch, selectively by line switching or by packet switching, and to a switch for carrying out the method.

10

The present-day situation in telecommunications is marked by a division between two different connecting and switching technologies. These are the synchronous line-switching technology (line-switching or circuit switching) and asynchronous packet-switching technology (packet-switching).

15

Line-switching connections use line switches, alias line switching equipment, between the individual line sections, each of which copies over 1 byte packets and has a corresponding buffer size. Packet-switching connections use packet switches, alias packet switching equipment, between the individual line sections of a network, each of which copies over multi-byte packets. The buffer size of a packet switch correspondingly amounts to n bytes where n stands for the number of bytes in the copied data packets. The term "switch" is used below so that it includes both a line switch of a line switching network and a packet switch of a packet switching network.

20

25

A line switch, alias line switching equipment, is called telecommunications apparatus (TK apparatus) in the private sector, and exchanges of the network supplies in the public sector. A packet switch, alias packet switching apparatus, is also called a router, an IP switch or a host computer.

30

Line switching connections are synchronous, i.e., data transfer is carried out substantially without any time delay from one line section to an adjoining line section through a switch (here, a line switching apparatus).

35

When a line-switching call is put through, a connection is continually provided in real time with the complete bandwidth of a channel between two points. Even if no useful information is being sent e.g., during a pause in telephone conversation, the transmission channel is occupied or engaged. Line-switching connections are expensive, particularly during telephone conversations since the costs accumulate irrespectively of the information actually transferred. The advantage of a line switching connection is that it is free of any time delay and has a fixed bandwidth.

The other important type of data exchange nowadays is the packet exchange. With packet exchange, data, e.g., audio data, video data or computer files, are packeted and transferred as data packets. Packet switching works in the asynchronous transfer mode, i.e., data is transferred time-delayed between two adjoining line sections by a switch (here, a packet switching apparatus). In the case of packet-switching exchanges, and quite differently from line-switching exchanges, a fixed connection does not have to be maintained. It is connection-less, i.e., each packet is treated individually and not in conjunction with others.

Packet switching is used in particular on the Internet. The data packets are termed there as IP packets (IP = Internet Protocol). Each IP packet contains a header which contains, inter alia, sender and receiver addresses. The IP packets form a data flow which is transferred through packet switching apparatus (alias IP switches or Routers or Host computers) in the Internet from the sender to the relevant receiver.

As a result of the length of the IP packets (16 bytes or more), a time delay occurs in the packet switching apparatus when copying. This time delay can be so great, when there is a heavy load on the packet switching apparatus which passes a data packet

over the route to the destination address, that certain applications are no longer possible.

5 These delays are of considerable significance particularly in the case of the Internet. With Internet telephony, a cost-conscious caller uses the normal Internet with approximately 8 kbit/s bandwidth and a time delay of 0.5 seconds. When the Internet is overloaded, the time delay of the individual packets  
10 becomes so great that an acceptable conversation connection between telephone partners is no longer possible.

Internet telephony is marked by a great advantage that only the relevant local telephone charges to the next POP (Point of Presence), the access point to the Internet offered by an  
15 Internet Service Provider ISP, as well as time charges calculated by the ISPs for the length of the Internet access as well as volume charges, but not expensive long distance telephone charges are incurred.

From US patent no. 4,996,685 a method and device are known  
20 which allow in an ISDN communications network, during an existing connection between a user and a host computer, a dynamic change between a line switching connection through an ISDN B channel and a packet-switching connection through an ISDN D channel. A command to change between a line-switching and a packet-switching  
25 connection thereby always emanates from the Host computer.

The method disclosed in US patent no. 4,996,685 is restricted to undertaking on an ISDN connection a change between a line-switching and a packet-switching data transfer whereby a line-switching transfer is carried out on a B channel and a  
30 packet-switching transfer is carried out on the D channel. A method of this kind is indeed expedient to produce effective access from an end subscriber to a host computer, possibly an exchange point of the telephone network or an access point to the internet, but does not relate to the transfer of data between  
35 switches or routers of a network.



WO 95/31060 A1 describes a method for transferring data between an information source and a destination device wherein  
5 the data to be transferred are transferred as data packets. Depending on type of information of the data packets, the data are transferred automatically either solely by line-switching or solely by packet-switching. More particularly in the case of small amounts of data to be transferred, a packet-switching  
10 transfer is chosen and in the case of large amounts of data, a line-switching data transfer is chosen.

WO 95/25407 A1 describes a method for transferring data between a data source and transceiver either through a packet-switching network or a line-switching network. A control device  
15 is thereby provided which uses certain criteria to decide which network and which method of transfer is best suited for the transfer and then selects same.

US patent no. 4,903,260 describes a digital coupling network and a coupling field chip which are designed so that paths  
20 leading from any input to any output can, depending on requirements, either be switched through for line-switching connections or can be preset for packet-switching information. Preset paths for the packet-switched information thereby form a network whose junctions lie in the coupling field chip of the  
25 coupling network. Those function devices which are required to send each data packet on the path preset for same are integrated in the coupling field chips. It is thus possible to divide up a single coupling network depending, on requirements, dynamically into a line-switching network and a packet-switching network.

30  
SUMMARY OF THE INVENTION

Based on the prior art, the present invention is concerned with the problem of providing a method for transferring data from a first switch to a second switch and providing a switching for  
35 carrying out the method which, depending on the data origin and

headers of a user or network management system, allows flexible data transfer between the switches and more particularly cost-effective data transfer with real time properties.

The solution according to the present invention makes it possible during packet-switching connection between two switches to achieve a dynamic change-over to line-switching connection without interrupting the connection. This is always advisable if a data build up of data packets exists before the switches of the packet-switching network. Through the establishment of a line-switching connection between the switches, a bypass is produced according to the invention on which data can be transferred with fixed bandwidth and slight time delays substantially in real time so that the data blockage is bypassed. Since a line switching connection is established only when required, i.e., when a packet-switching data transfer no longer has the desired bandwidth, the invention allows a flexible, most cost-effective data transfer.

The term "switch" is used in the sense of the present invention as already explained so that it includes both a line-switch of a line-switching network which copies over 1-byte packets, and a packet-switch (router) of a packet-switching network which copies over multi-byte packets. Data to be transferred can be any type of data, such as audio data, video data or computer files.

The present invention provides for carrying out the method according to the present invention, on switches which allow both line-switching and packet-switching, and combine the functions of a line-switch and a packet-switch. A switch according to the present invention has a packeting device for packeting and unpacketing data, an IP switching device for routing data packets, a line-switching device for establishing connections for switching through data channels and a control device which

directs incoming data either to the IP switching device or to the line switching device depending on the control signals.

5 The corresponding control signals are triggered by a user, or at the command of a network management system and are transferred together with other signaling data to the switch. Alternatively, the switch itself automatically produces a corresponding control command upon exceeding a certain bandwidth  
10 of the packet-switching transfer.

The network which consists of interconnected switches according to the present invention forms an Intranet wherein data transfer can be interchanged dynamically between line switching and packet switching and ensures, under normal conditions, data  
15 transfer substantially in real time through the possibility of establishing when required, a line-switching connection of a fixed bandwidth. This is particularly important for internet telephony.

There are numerous useful areas for the switches according to the present invention. The switches according to the present invention can even replace conventional line-switches such as TK  
20 equipment and exchanges as well as packet switches. More particularly they can be used to build up new networks with real time capacity (intranets) which can operate both by line-switching and by packet-switching.  
25

The method according to the present invention is used in a first embodiment of the invention between two switches which are part of a line-switching network, but not directly part of a packet-switching network. Therefore, for a packet-switching  
30 transfer, first a connection is established through the line-switching network from a first switch to an access point to the packet-switching network (such as Internet access point). The data are transferred line-switched to the access point to the packet-switched network, where they are packeted if they do not  
35 already exist as packets, and are transferred from the access

point packet-switched through the packet-switching network to the second switch. The data are thereby preferably already packeted  
 5 in the first switch and transferred as data packets line-switched to the access point.

If both switches are part of both a line-switching network and a packet-switching network, then in a second embodiment of the method according to the present invention, a packet-switched  
 10 data transfer can take place directly between the switches. With both embodiments, with a presence of a corresponding control signal, a line-switching connection is built up through the line-switching network directly to the second switch. If there is no longer any need for a line-switching transfer, then a change back  
 15 to a packet-switching transfer takes place.

In one embodiment of the method according to the present invention, the data packets remain, after the change-over to a line-switching data transfer, as data packets and are then transferred as such by line-switching. In an alternative  
 20 embodiment, the data packets are unpacketed, more particularly the headers of the data packets are removed, and only the data are then transferred by line-switching. The advantage of the first embodiment lies in the fact that if the data is once again to be transferred over the packet-switching network, they already  
 25 exist as data packets and therefore time is saved when switching. The advantage of the second embodiment is that by removing the headers from the individual data packets, the effective bandwidth of the data transfer is increased.

In a preferred embodiment of the method according to the present invention, the same data channel is used for transferring  
 30 the data packets from the first switch to the access point to the packet-switching network, and for transferring data from a first switch to the second switch through the line-switching network. This embodiment has the advantage that only one data channel is  
 35 constantly engaged which, depending on the type of transfer,

transfers data either to the access point to the packet-switching network, or to the other switch. More particularly in the case  
 5 of an ISDN network, the same B data channel is used for both sending data to the access point to the packet-switching network, and for sending data through a bypass to another switch.

A data transfer from the first switch to the access point to the packet-switching network always takes place by line-  
 10 switching. Thus compared with a packet-switching transfer to the access point (e.g., through an ISDN D channel), which is also possible, a larger and fixed bandwidth is ensured up to the access point. If an ISDN network exists, then an ISDN B channel is used as the data channel. Data packets are thereby sent  
 15 through the B channel by applying them to the ISDN framework. This is known per se and fixed in the PPP protocol.

In a further embodiment, two data channels are provided for data transfer from a first switch, whereby through the first data channel the data packets are transferred to the access point to  
 20 the packet-switching network, and through the second data channel the data are transferred to the second switch through line-switching. Depending on the type of transfer, either the one data channel or the other data channel is used. This has the advantage that data can be transferred simultaneously by packet-switching  
 25 and line-switching. By way of example, less important data such as correspondence is transferred by packet-switching and audio data is transferred by line-switching.

In a further preferred embodiment of the present invention, with a line-switching data transfer between the first switch and  
 30 the second switch or between the first switch and the access point to the packet-switching network, the data of several users are multiplexed on a data channel by forming sub-channels of fixed bandwidth. It is thereby provided that the data of one user are transferred after its selection by line-switching with a  
 35 transfer rate which corresponds to only a fraction of the

transfer rate of the bandwidth which is available as standard to the user.

5 More particularly with an ISDN network on the B channels sub channels of a bandwidth of 32, 16, 8, 4, 2 or 1 kbit/s are available. To implement the sub-channels, only each n-th byte or each n-th bit of an ISDN frame is copied over immediately and forwarded on the data channel to the next switch or to the  
10 computer network access point.

The formation of sub-channels on a data channel, possibly an ISDN B channel or a data channel of the GSM mobile phone system, allows additional flexibility for the data transfer. In many cases, it is entirely adequate that the bandwidth only uses  
15 up a part of the bandwidth which is available on a data channel. The use of the sub-channel thereby has an advantage for the user that according to the bandwidth of the sub-channel, lower costs are incurred but a fixed bandwidth is still available. Sub-channels of different bandwidth thereby define different service  
20 quality.

Thus a packet-switching transfer, a line-switching transfer with a part of the available bandwidth of a data channel, and a line-switching transfer with the complete bandwidth of the data channel are available as alternatives.

25 In a further development of the method according to the present invention, with a change from a packet-switching transfer to a line-switching transfer, the address information of the data packets are evaluated and sorted according to network topology. Thus for each data packet whose destination addresses relate to  
30 the same topological area of the network, a switch located in this area is selected, a line-switching connection (bypass) is established to the selected switch and the corresponding data or data packets are transferred to the switch by line-switching.

A classification of the data packets is thereby preferably  
35 carried out according to geographical points of view, whereby,

for data packets whose destination address relate to the same geographical area, a switch located in this geographical area is selected and a line-switching connection is established to this switch. This allows a bypass to be effectively established since for data packets with roughly the same destination, a line-switching connection is established directly to a network junction which lies, regarding network topology, in the destination area of the data packets. The establishment of an effective bypass between the individual switches has great importance in the case of packet-switching networks since a data packet can run on the way from Berlin to Munich via Paris and New York. By bringing together all data packets intended for Munich and transferring these data packets by line-switching directly from Berlin to Munich, it is possible to provide a more effective data transfer.

For classifying data packets according to geographical points of view, it is preferable to compare the destination address with destination addresses stored in a data bank whereby the data bank contains a link between the destination addresses and the associated geographical position. The data bank is thereby preferably integrated in the switch. If the data packets are IP data packets, then the relevant IP addresses are consulted in the data bank and assigned to a certain bypass depending on the geographical destination.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows diagrammatically a telecommunications network according to the invention;

FIG. 2 shows diagrammatically a telecommunications network known in the prior art;

FIG. 3 is a diagrammatic illustration of a telecommunications network in which switches according to the invention form an Intranet;

FIG. 4 shows diagrammatically a switch according to the invention;

5 FIG. 5a shows a flow chart of the method according to the invention for transferring data between two switches; and

FIG. 5b shows diagrammatically a flow chart for the method according to the invention for selecting a destination switch through topological points of view.

# 10 DETAILED DESCRIPTION OF THE DRAWINGS

FIG. 2 shows a conventional telecommunications network. Data terminals such as telephone 1 or personal computer 2 are connected to an exchange 4 of the telephone network directly or by means of a telecommunications apparatus (TK-apparatus) 3 through an ISDN/POTS line. Where applicable, a local network LAN 5 is connected to the TK-apparatus 3. The exchanges 4 pass on incoming connection requests and provide line-switching connections. Entry to a packet-switching network is possible through an access point POP (Point of Presence) 6. Data are transferred between interlinked packet switches 10 by packet-switching through the packet-switching network.

The internet will now be considered as packet-switching network without restricting the present invention. Indeed any packet-switching network could be used such as mobile phone networks within the scope of the present invention.

The technologies used are known per se. The data transfer between terminals 1 and 2 and a line-switch (TK apparatus 3 or the exchange 4) takes place line-oriented, and similarly the data transfer between the individual line switches (such as between the individual exchanges 4 and the POP 6 of the Internet Service Providers IPS). The lines are switched through via coupling fields which are produced in the exchange and in the TK-apparatus.



The PCM 30 System is particularly wide spread in ISDN networks wherein 8 Bit codewords for each 30 useful channels within a scanning period of 125  $\mu$ s are multiplexed and sent in one pulse frame. However, no multiplexing takes place on a single channel. The pulse frame is transferred in constant repetition between sender and receiver even if no useful signals are contained. In the digital coupling field, individual bytes are copied and then sent (switch of 1-byte-packet). Since during the exchange process only one byte is read into a memory each time and then read out again, only a minimal time delay occurs when exchanging the connecting path.

From the access point POP 6 to the Internet, the transfer of data is still only carried out packet-switched on the basis of the known network protocol UDP/IP or TCP/IP. Access to the Internet is brought about by a packet switch (hereinafter also called IP Switch) which receives data packets which are not intended for itself and passes them on to the party network whose address they support. During routing, copying of the IP packets is carried out (switch of multi-byte packets). Time delays thereby occur in the packet-switching network according to the size of the IP packet and the number of routers passing on an IP-packet. These time delays can assume such proportions in the event of overloading the IP switches 10 that in the case of the Internet telephony, delays of more than 0.5 s may occur.

FIG. 1 shows a telecommunications network according to the present invention with switches 7a and 7b according to the present invention which are shown as starred and are described in detail in FIG. 3 . The switches 7a and 7b integrate the functions of a packet switch and a line switch.

The important factor is therefore the possibility of dynamically switching between packet-switching and line-switching during one transfer, as will be described in further detail below. It is thereby possible to change over, when desired, from

an asynchronous packet-switching transfer of variable bandwidth  
to a synchronous line-switching transfer of greater and fixed  
5 bandwidth. Internet telephony and downloading of files from a  
WWW server are two important uses.

The implementation of the switches 7a and 7b takes place  
selectively through hardware or software. The line switching, is  
thereby preferably implemented by hardware and the packet-  
10 switching by software. Thus with line switching, after switching  
through a connection the data are forwarded without further  
examination, whilst with packet switching the destination  
addresses of each data packet is evaluated and the next IP switch  
has to be selected from the routing tables. A switching device  
15 for the switches 7a and 7b which undertakes a change over between  
packet and line-switching is preferably likewise implemented as  
software.

The switches 7a and 7b can be mounted according to FIG. 1  
at different points in the telecommunications network. The switch  
20 7a represents a service access module for connecting the LANs or  
end terminals 1 and 2 to the ISDN/PSTN network and internet. On  
the user side, the switch 7a has an ethernet interface for a LAN  
connection, a printer interface and interfaces for connecting  
telephones (radio telephones, ISDN telephones, analog telephones)  
25 - not shown. The switch 7a is connected to an exchange point 4  
of the telephone network through a line 8.

Since the switch 7a is not a part of the internet, it is  
necessary for the packet-switching transfer of data through the  
internet to first make a connection with the access point POP 6.  
30 This can be carried out through the exchange point 4 or even  
through a standing line 9 to the POP 6. The data are transferred  
line-switched up to the POP 6 and are preferably already  
packeted. If a change to line-switching data transfer is to take  
place, then a line to another switch is switched through the  
35 exchange 4 and the data are transferred to this by line-

switching. The switch 7a thus routes the IP switched/line-switched channels to the line 8 controlled by same so that they  
5 are more cost-effective or more real time depending on the wishes of the user or provider of the channels.

The switch 7a is integrated in the internet and connected to further IP switches 11 and/or line switches 12. Ideally the network still only consists of switches 7b which allow both line  
10 switching and packet switching, so that with each switch 7b there is the possibility where necessary of providing a higher quality line-switching transfer instead of a packet-switching transfer. A line-switched transfer is thereby established as bypass, more particularly between switches where a data blockage builds up.

15 FIG. 3 shows a telecommunications network wherein switches 7 which allow a data transfer selectively by packet switching or by line switching form an Intranet within the internet. A real time communications possibility is thereby present between the switches 7. So that this is always possible, additional real time  
20 communications channels exist between the switches 7. These are additional ISDN/PSTN connections or additional Intranet channels. A line switching connection (bypass) between the switches 7 can thus arise not only through the telephone network, but also through separate channels.

25 FIG. 4 shows diagrammatically the establishment of a switch 7 according to the present invention. The switch 7 is part of both a packet-switching network (internet) and a line-switching network (telephone network), i.e., it is connected through lines to further network junctions to which it can transfer or receive  
30 line-switched or packet-switched data.

Data coming in through a data input 74 can have any source, more particularly come from an IP switch/router, a line-switch such as an exchange point or a telecommunications unit, from a LAN or from an end terminal 1 or 2. The data input 74 has for  
35 this purpose, in a known way, an ethernet interface, an analog

interface with A/D converter and an ISDN interface. In addition where applicable, an ATM interface and an interface with a mobile  
 5 phone network can also be provided. The ISDN networks are with incoming data of 8 bit long words which arrive on a multiplexed supply line of the switch 7.

The switch 7 has a known IP switch 72 which copies over incoming IP packets (switch of multi-byte packets) and forwards  
 10 them in the internet to suitable switches according to the address of the packets. These relate to the known internet protocol UDP/IP and TCP/IP. A data compression device 721 is integrated as an option in the IP switch 72. For data compression, a reference is made to the international compression  
 15 standards developed for individual communications, more particularly the compression process according to ITU standard G. 72 X. Furthermore, a coding device 722 for coding data packets can be provided as an option.

Furthermore, the switch 7 has a line switching device 73.  
 20 This has a digital coupling 731 which is known per se for switching through telephone conversation channels of the line-switching network, and a multiplex/demultiplex device 732 which produces sub-channels on existing data channels, as will be described in further detail below.

25 The internal control commands, as to whether a packet switching is to take place through the IP switch or a line switching is to take place through the line switching device 73, are produced in a control device 71. The device 71 is substantially a switch which forwards the incoming data either  
 30 as data packets to the IP switch 72 or as bit flow to the line switching device 73. To this end, the control information of the incoming data are evaluated. The change-over control unit 711 monitors and controls which open connections are present (i.e., which and how many data channels are connected) and which  
 35 bandwidth the individual data channels require.

1 34248/JEJ/M521

In detail the control device 71 has a change-over control unit 711, two packeting/unpacketing devices 713 and 714, and an  
5 intermediate register 712. The change-over control unit is connected to a topography data bank 75 which contains geographical data for a number of IP addresses.

If the incoming data are IP packets, then the headers of the IP packets are evaluated by the change-over control unit 711. If  
10 the incoming data are a continuous data stream, then the signaling information of the signaling channel (in band signaling or outband signaling) are evaluated by the change-over control unit 711. The basic state thereby provides that the incoming data are sent into the internet through the IP switch 72. If the  
15 incoming data do not yet exist as IP packets then they are packeted into corresponding IP packets in the packeting/unpacketing device 714 and sent to the IP switch.

If the data exist as IP packets but are to be transferred line-switched through the line-switching device 73 then the data  
20 are, where applicable, unpacketed in the packeting/unpacketing device 713. More particularly the headers, of the data packets are removed. Unpacketing is optional however and not absolutely necessary since data packets can be transferred line-switched where applicable according to the PPP protocol. The (packeted  
25 or non-packeted) data are transferred as bit stream to the line switching device 73 by the change-over control unit 711.

Through a control command which is sent by an end terminal or another switch and for example triggered by a user by pressing a certain button on the terminal or by the network management  
30 system, the type of communication is switched over to line-oriented or packet-oriented communication.

A corresponding signaling command for changing between packet and line switching is, for example, represented by a certain bit sequence wherein the switching unit 71 stores the  
35 detailed incoming data in an intermediate register 712 and

compares it with stored bit sequences. If a certain bit sequence exists, then a change over to a different type of switching is carried out. Alternatively, it can also be possible for the change-over control device 711 to monitor the bandwidth of a transfer and on understepping or exceeding a certain bandwidth and/or in the event of a time delay when forwarding IP data packets to automatically release a control command to change over to the relevant other type of transfer.

To change from packet switching to line switching, first at the command of the control unit 71, a connection is made via the line-switching unit 73 (bypass) with another switch (destination switch). To this end, the ISDN signaling command SETUP is sent to the next exchange point. After the connection is established, all the incoming data of the communications connection considered are no longer directed through the IP-switch 72 but through the line-switching unit 73. The data are now transferred by line-switching with fixed bandwidth through the established bypass to the other switch.

The change-over control unit 711 thereby checks, within the scope of the change-over process and prior to sending the data to the device 73, whether they are IP packets and whether unpacketing is to take place in the packeting/unpacketing device 713. The decision on this is made dependent on control signals of the network management system or the end terminal or alternatively by the change-over control unit 711 itself dependent on the data arrival. The control signals here contain corresponding transfer parameters. In each case, the data after being sent to the device 73 are then exposed in the coupling field 731 to an ISDN data frame.

To establish the most effective line-switching connection possible, it is important to select a suitable destination switch where the bypass is established. To this end, a switch is selected as destination switch which lies in a geographical area

which coincides with the destination address of numerous IP packets. Then in particular, these IP packets are transferred through the bypass to the corresponding destination switch so that the data packets still only have a short transfer path from the destination switch to the final destination.

The classification of the IP packets and selection of a corresponding destination switch takes place by means of the topology data bank 75 which contains a geographical link between a number of IP addresses and their geographical position. In the line switching device 73, the IP destination address of each packet is compared with the addresses stored in the data bank 75 and in the event of a successful association of the IP address, this is given a code. This can be a number which characterizes a certain geographical region. This code is recognized by the coupling field 731 and the data packet is then switched through to the corresponding destination switch.

Since it would result in too much time delay to interrogate the data bank 75 for each data packet, the change-over control unit 711 contains a cache which can be quickly accessed and in which the result of the last data bank inquiry is stored. If the IP address of a data packet arriving through the data input 74 is stored in the cache, then the corresponding code can be quickly given.

If the IP address is not contained in the cache, then a data bank inquiry is carried out, and the IP packets are directed onto the IP switch 72 until the result of the data bank inquiry is provided. Only then is a change-over made for this data to a line-switching transfer through a bypass. It is thereby possible that several bypasses to different destination switches exist at the same time whereby the change over control unit 711 controls the coupling field 731 so that the data packets are each time sent to the destination switch which is most favorable from the network topological point of view. The change-over control unit

711 thus informs the coupling field 731 of which data is to be sent to which destination switch.

5 If the destination address of a data packet is not contained in the data bank 75, then those intermediate junctions of the packet-switching network are checked to be fully functioning which are normally run through when sending data packets with a certain destination address. To this end, the corresponding data  
10 are exchanged between the individual network junctions in known way by trace routing. At the appropriate intermediate junctions, i.e., the intermediate junctions with low functioning output, it is determined whether the ISDN number is known and this is requested where applicable. The change-over control unit 711 of  
15 the data bank 75 is thereby operated in the manner already described. A bypass is then established from the change-over control unit 711 to a switch which lies in the chain of switches as close as possible to the destination switch.

The multiplex/demultiplex device 732 of the line-switching  
20 device 73 allows, depending on the control commands of the change-over control unit 711, a line-switching transfer to sub-channels with a bandwidth which corresponds to a fraction of the usual bandwidth of a data channel considered. Data channels are thereby bundled which are formed or determined in the coupling  
25 field 731 according to the control commands of the change-over control unit 711. A time multiplex channel of the PCM 30 system is considered as ISDN data frame which has information of 30 data channels and two signal channels. The bandwidth of the data channels each amounts to 64 kbit/s.

30 The multiplex/demultiplex device 732 allows a multiplexing inside each of the 30 data channels of the time multiplex channel. To this end, two methods are alternatively used. In a first method only a part of the 8 bit of a PCM Word is switched through each other, thus 1, 2 or 4 bits. The bandwidth is



reduced accordingly to 8, 16 or 32 kbit/s. The data of several channels are in this way multiplexed on one data channel.

5 Alternatively a PCM word (byte) of the time multiplex channel of the PCM 30 system is not switched through in each of the successive pulse frames, but only in each n-th pulse frame whereby the bandwidth is reduced to  $64/n$  kbit/s.

The two multiplex methods described can also be combined.  
10 By way of example, one bandwidth of 1 kbit/s is produced for one data channel in that each eight bit in each eighth frame of the ongoing data channel stems from the data channel considered.

The switching through in the line switching device 731 takes place, depending on the selected data rate, and in the case of  
15 transfer rates per data channel unequal to 64 kbit/s, includes the multiplex/demultiplex device 732. If no multiplexing takes place on a data channel, then the data are passed by the multiplex/demultiplex device 732.

For the channel or sub-channel considered, a line-switching  
20 transfer takes place to the switch which represents the other side of the line-switching connection until a control command again reaches the device 71 to switch over again to packet-switching. This command is in turn coded by a certain bit sequence or is produced automatically. Then through the control  
25 device, the switched-through line is broken off and the incoming data are then again directed to the IP switch 72.

FIGs. 5a and 5b show the method sequence. FIG. 5a shows the course of the method when changing from a packet-switching data transfer to a line-switching data transfer between two switches.  
30 With the presence of a corresponding control signal, a line-switching connection is set up to another switch and the data sent by line-switching.

If a line-switching data transfer is to take place to sub-channels of fixed bandwidth then a multiplexer/demultiplexer is  
35 activated which multiplexes several data streams so that each

time only every  $n^{\text{th}}$  bit and/or every  $n^{\text{th}}$  byte is reserved in the outgoing data stream for an incoming data stream. It can thereby be provided that the individual sub-channels have a different bandwidth, i.e., the different input data streams have different proportions in the outgoing data stream. With the presence of a further control signal, a change back to a packet-switching transfer is undertaken.

FIG. 5b shows the selection of a suitable switch when establishing a bypass. To this end, the headers of the IP data packets are compared with the information of a data bank. If the header information is associated with a certain geographical destination, then the bypass is established to a switch mounted in this geographical area. If the header information is not associated with a certain geographical destination, then as described above, a bypass is made to an intermediate junction where the data packets pass through in the normal case. Where applicable, the switch has numerous bypasses to different switches wherein each time only data packets with the same or similar topological destination features are transferred to the individual switches within the frame of the bypass.

The present invention is not restricted in its design to the embodiments given above. Rather a number of variations are possible which make use of the invention even in fundamentally different types of designs.

1 34248/JEJ/M521

ABSTRACT

5 A method for transferring data from a first switch to a  
second switch selectively by line-switching or by packet-  
switching as well as to a switch for carrying out the method.  
Data packets are thereby first transferred packet-switched  
through a packet-switching network to the second switch. With  
the presence of a corresponding control signal a line-switching  
10 connection is established from the first switch to the second  
switch and the data are then transferred through this connection.

Where applicable a renewed change over to a packet-switching  
transfer is carried out. A flexible packet-switching or line-  
switching data transfer linked with dynamic costs between the  
15 junctions of a telecommunications network is enabled.

JEJ/dlm

JEJ PAS179887.2--4/30/99 10:56 am

20

25

30

35

METHOD FOR TRANSFERRING DATA IN A TELECOMMUNICATIONS  
NETWORK AND SWITCH FOR THE IMPLEMENTATION OF THE METHOD

5 Subject of the invention

The invention relates to a method for transferring data from a first switch to a second switch selectively by line switching or by packet switching and to a switch for carrying out the method.

## Background of the invention

The present-day situation in telecommunications is marked by  
15 a division between two different connecting and switching  
technologies. These are the synchronous line-switching  
technology (line-switching or circuit switching) and  
asynchronous packet-switching technology (packet-switching).

Line-switching connections use line switches alias line switching equipment between the individual line sections which each copy over 1 byte packets and have a corresponding buffer size. Packet-switching connections use packet switches alias packet switching equipment between the individual line sections of a network which copy over multi-byte packets. The buffer size of the packet switch correspondingly amounts to n bytes wherein n stands for the number of bytes of the copied data packets. The term "switch" is used below so that it includes both a line switch of a line switching network and a packet switch of a packet switching network.

A line switch alias line switching equipment is called telecommunications apparatus (TK apparatus) in the private  
35 sector and exchanges of the network supplies in the public

sector. A packet switch alias packet switching apparatus is also called a router, IP switch or host computer.

Line switching connections are synchronous, ie data transfer is carried out substantially without any time delay from one line section to an adjoining line section through a switch (here line switching apparatus).

When a line-switching call is put through, a connection is continually provided in real time with the complete band width of a channel between two points. Even if no useful news is being sent eg during a telephone conversation the transmission channel is occupied or engaged. Line-switching connections are expensive, particularly when thinking of telephone conversations since the costs arise irrespectively of the information actually transferred. The advantage lies in a connection which is free of any time delay and which has a fixed band width.

The other important type of data exchange nowadays is the packet exchange. With packet exchange data, eg audio data, video data or computer files are packeted and transferred as data packets. Packet switching works on the asynchronous transfer mode, ie data is transferred time-delayed between two adjoining line sections by a switch (here packet switching apparatus). In the case of packet-switching exchanges, and quite different from line-switching exchanges, a fixed connection does not have to be maintained. It is connection-less, ie each packet is treated individually and not in conjunction with others.

Packet switching is used in particular on the Internet. The data packets are termed there as IP packets (IP = Internet Protocol). Each IP packet contains a header which contains inter alia a sender and receiver address. The IP packets

form a data flow which is transferred through packet switching apparatus (alias IP switches alias Routers alias Host computers) in the Internet from the sender to the relevant receiver.

5

As a result of the length of the IP packets (from 16 bytes upwards) a time delay occurs in the packet switching apparatus when copying. This time delay can be so great when there is a heavy load on the packet switching apparatus which pass a data packet over the route to the destination address that certain applications are no longer possible.

10

These delays are of considerable significance particularly in the case of the Internet. With Internet telephony a cost-conscious caller uses the normal Internet with approximately 8 kbit/s bandwidth and a time delay of 0.5 seconds. When overloading the Internet the time delay of the individual packets becomes so long that an acceptable conversation connection between telephone partners is no longer possible.

15

20

Internet telephony is marked by the great advantage that there are incurred only the relevant local telephone charges at the next POP (Point of Presence), the access point to the Internet offered by an Internet Service Provider ISP, as well as time charges calculated by the ISPs for the length of the Internet access as well as where applicable volume charges, but not however expensive telephone charges.

25

From US PS 4 996 685 a method and device are known which allow in an ISDN communications network during an existing connection between a user and a host computer a dynamic change between a line switching connection through an ISDN B channel and a packet-switching connection through an ISDN D channel. A command to change between a line-switching and

30

35

a packet-switching connection thereby always emanates from the Host computer.

5 The method disclosed from US PS 4 996 685 is restricted to undertaking on an ISDN connection a change between a line-switching and a packet-switching data transfer whereby a line-switching transfer is carried out on a B channel and a packet-switching transfer is carried out on the D channel. A method of this kind is indeed expedient to produce  
10 effective access from an end subscriber to a host computer, possibly an exchange point of the telephone network or an access point to the internet but does not relate to the transfer of data between switches or routers of a network.

15 Object of the invention

Based on the prior art the present invention is concerned with the problem of providing a method for transferring data from a first switch to a second switch and providing a  
20 switching for carrying out the method which in dependence on the data origin and headers of a user or network management system allows flexible data transfer between the switches and more particularly a cost-effective data transfer with real time properties.

25

Abstract of the invention

The object of the invention is achieved according to the invention by a method with the features of claim 1, a method  
30 with the features of claim 2, and a switch with the features of claim 16. Advantageous embodiments of the invention are characterised in the sub-claims.

The solution according to the invention makes it possible  
35 during a packet-switching connection between two switches to

achieve a dynamic change-over to line-switching connection without interrupting the connection. This is always advisable if a data build up of data packets exists before the switches of the packet-switching network. Through the  
5 establishment of a line-switching connection between the switches a bypass is produced according to the invention on which data can be transferred with fixed band width and slight time delays substantially with real time so that the data blockage is by-passed. Since a line switching  
10 connection is however only established when required, ie when a packet-switching data transfer no longer has the desired band width, the invention allows a flexible most cost-effective data transfer.

15 The term "switch" is used in the sense of the invention as already explained so that it includes both a line-switch of a line-switching network which copies over 1-byte packets, and also a packet-switch (router) of a packet-switching network which copies over multi-byte packets. Data to be  
20 transferred can be any type of data, such as audio data, video data or computer files.

The invention provides for carrying out the method according to the invention switches which allow both line-switching  
25 and packet-switching and combine the functions of a line-switch and a packet-switch. A switch according to the invention has a packeting device for packeting and unpacketing data, an IP switching device for routing data packets, a line-switching device for establishing  
30 connections for switching through data channels and a control device which directs incoming data either to the IP switching device or to the line switching device depending on the control signals.

35 The corresponding control signals are triggered by a user or



at the command of a network management system and are transferred together with other signalling data to the switch. Alternatively the switch itself automatically produces a corresponding control command on exceeding a  
5 certain band width of the packet-switching transfer.

The network which consists of interconnected switches according to the invention forms an Intranet wherein data transfer can be interchanged dynamically between line  
10 switching and packet switching and which ensures under normal conditions data transfer substantially in real time through the possibility of establishing when required a line-switching connecting of fixed band width. This is particularly important for internet telephony.

15 There are numerous useful areas for the switches according to the invention. The switches according to the invention can even replace conventional line-switches such as TK equipment and exchanges as well as packet switches. More  
20 particularly they can be used to build up new networks with real time capacity (intranets) which can operate both by line-switching and by packet-switching.

The method according to the invention is used in a first  
25 variation of the invention between two switches which are indeed part of a line-switching network but which are not directly part of a packet-switching network. Therefore for a packet-switching transfer first a connection is established through the line-switching network from a first  
30 switch to an access point to the packet-switching network (such as Internet access point). The data are transferred line-switched to the access point to the packet-switched network where they are packeted if they do not already exist as packets, and are transferred from the access point  
35 packet-switched through the packet-switching network to the

second switch. The data are thereby preferably already packeted in the first switch and transferred as data packets line-switched to the access point.

5 If both switches are both part of a line-switching network and a packet-switching network then in a second variation of the method according to the invention a packet-switched data transfer can take place directly between the switches. With both variations with the presence of a corresponding control  
10 signal a line-switching connection is built up through the line-switching network directly with the second switch. If there is no longer any need for a line-switching transfer then a change back to a packet-switching transfer takes place.

15 In one embodiment of the method according to the invention the data packets remain after the change-over to a line-switching data transfer as data packets and are then transferred as such by line-switching. In an alternative  
20 embodiment the data packets are unpacketed, more particularly the headers of the data packets are removed and the data are only then transferred by line-switching. The advantage of the first variation lies in the fact that the data with renewed transfer to packet-switching network  
25 already exist as data packets and therefore time is saved when switching. The advantage of the second variation is that by removing the headers from the individual data packets the effective band width of the data transfer is increased.

30 In a preferred embodiment of the method according to the invention the same data channel is used for transferring the data packets from the first switch to the access point to the packet-switching network and for transferring data from  
35 a first switch to the second switch through the line-

switching network, This has the advantage that only one data channel is only constantly engaged which depending on the type of transfer transfers data either to the access point to the packet-switching network or to the other switch. More particularly in the case of an ISDN network the same B data channel is used both for sending data to the access point to the packet-switching network and for sending data through a bypass to another switch.

10 A data transfer from the first switch to the access point to the packet-switching network always takes place by line-switching. Thus compared with a packet-switching transfer to the access point (eg through an ISDN D channel) which is also possible a larger and fixed band width is ensured up to 15 the access point. If an ISDN network exists then an ISDN B channel is used as the data channel. Data packets are thereby sent through the B channel by applying them to the ISDN framework. This is known per se and fixed in the protocol PPP.

20 In a further embodiment two data channels are provided for data transfer from a first switch whereby through the first data channel the data packets are transferred to the access point to the packet-switching network and through the second data channel the data are transferred to the second switch 25 through line-switching. Depending on the type of transfer either the one data channel or the other data channel is used. This has the advantage that data can be transferred simultaneously by packet-switching and line-switching. By way of example less important data such as correspondence is 30 transferred by packet-switching and audio data is transferred by line-switching.

In a further preferred embodiment of the invention with a 35 line-switching data transfer between the first switch and

the second switch or between the first switch and the access point to the packet-switching network the data of several users are multiplexed on a data channel by forming sub-channels of fixed band width. It is thereby provided that  
5 the data of one user are transferred after its selection by line-switching with a transfer rate which corresponds to only a fraction of the transfer rate of the band width which is available as standard to the user.

10 More particularly with an ISDN network on the B channels sub channels of a band width of 32, 16, 8, 4, 2 or 1 kbit/s are available . To implement the sub-channels only each n-th byte or each n-th bit of an ISDN frame is copied over immediately and forwarded on the data channel to the next  
15 switch or to the computer network access point.

The formation of sub-channels on a data channel, possibly an ISDN B channel or a data channel of the GSM mobile phone system, allows additional flexibility for the data transfer.  
20 With many cases it is entirely adequate that the band width only uses up a part of the band width which is available on a data channel. The use of the sub-channel thereby has an advantage for the user that according to the band width of the sub-channel lower costs are incurred but a fixed band  
25 width is thereby available. Sub-channels of different band width thereby define different service quality.

Thus a packet-switching transfer, a line-switching transfer with a part of the available band width of a data channel  
30 and a line-switching transfer with the complete band width of the data channel are available as alternatives.

In a further development of the method according to the invention with a change from a packet-switching transfer to  
35 a line-switching transfer the address information of the

data packets are evaluated and sorted according to network topology. Thus for each data packet whose destination addresses relate to the same topological area of the network a switch located in this area is selected, a line-switching  
5 connection (bypass) is established to the selected switch and the corresponding data or data packets are transferred to the switch by line-switching.

A classification of the data packets is thereby preferably  
10 carried out according to geographical points of view, whereby for data packets whose destination address relate to the same geographical area a switch located in this geographical area is selected and a line-switching connection is established to this switch. This allows a  
15 bypass to be effectively established since for data packets with roughly the same destination a line-switching connection is established directly to a network junction which lies regarding network topology in the destination area of the data packets. The establishment of an effective  
20 bypass between the individual switches has great importance in the case of packet-switching networks since a data packet can run on the way from Berlin to Munich via Paris and New York. By bringing together all data packets intended for Munich and transferring these data packets by line-switching  
25 directly from Berlin to Munich it is possible to provide a more effective data transfer.

For classifying data packets according to geographical points of view it is preferred to compare the destination  
30 addresses with destination addresses stored in a data bank whereby the data bank contains a link between the destination addresses and the associated geographical position. The data bank is thereby preferably integrated in the switch. If the data packets are IP data packets then  
35 the relevant IP addresses are consulted in the data bank and

assigned to a certain bypass depending on the geographical destination.

#### Description of an embodiment

5

The invention will now be explained with reference to the embodiments shown in the drawings in which:

10 Figure 1 shows diagrammatically a telecommunications network according to the invention;

Figure 2 shows diagrammatically a telecommunications network known in the prior art;

15 Figure 3 is a diagrammatic illustration of a telecommunications network in which switches according to the invention form an Intranet;

Figure 4 shows diagrammatically a switch according to the invention;

20 Figure 5a shows a flow chart of the method according to the invention for transferring data between two switches and

Figure 5b shows diagrammatically a flow chart for the method according to the invention for selecting a destination switch through topological points of view.

25

Figure 2 shows a conventional telecommunications network. Data terminals such as telephone 1 or personal computer 2 are connected to an exchange 4 of the telephone network directly or by means of a telecommunications apparatus (TK-apparatus) 3 through an ISDN/POTS line. Where applicable a local network LAN 5 is connected to the TK-apparatus 3. The exchanges 4 pass on incoming connection wishes and provide line-switching connections. Entry to a packet-switching network is possible through an access point POP (Point of Presence) 6. Data are transferred between interlinked

30

35

packet switches 10 by packet-switching through the packet-switching network.

5 The internet will now be considered as packet-switching network without restricting the invention. Indeed any packet-switching networks could be used such as mobile phone networks within the scope of the invention.

10 The technologies used are known per se. The data transfer between terminal 1, 2 and a line-switch (TK apparatus 3 or the exchange 4) takes place line-orientated, and similarly the data transfer between the individual line switches (such as between the individual exchanges 4 and the POP 6 of the Internet Service Providers IPS). The lines are switched  
15 through via coupling fields which are produced in the exchange and in the TK-apparatus.

20 The PCM 30 System is particularly wide spread in ISDN networks wherein 8 Bit codewords for each 30 useful channels within a scanning period of 125  $\mu$ s are multiplexed and sent in one pulse frame. However no multiplexing takes place on a single channel. The pulse frame is transferred in constant repetition between sender and receiver even if no useful signals are contained. In the digital coupling field  
25 individual bytes are copied and then sent (switch of 1-byte-packet). Since during the exchange process only one byte is read into a memory each time and then read out again only a minimal time delay occurs when exchanging the connecting path.

30

From the access point POP 6 to the Internet the transfer of data is still only carried out packet-switched on the basis of the known network protocol IP/UDP or IP/TCP. Access to the Internet is brought about by a packet switch  
35 (hereinafter also called IP Switch) which receives data

5

10

15

30

35



undertakes a change over between packet and line switching is preferably likewise implemented as software.

The switches 7a, 7b can be mounted according to Figure 1 at  
5 different points in the telecommunications network. The switch 7a represents a service access module for connecting the LANs or end terminals 1, 2 to the ISDN/PSTN network and internet. On the user side the switch 7a has an ethernet interface for a LAN connection, a printer interface and  
10 interfaces for connecting telephones (radio telephones, ISDN telephones, analogue telephones ) - not shown. The switch 7a is connected to an exchange point 4 of the telephone network through a line 8.

15 Since the switch 7a is not part of the internet it is necessary for the packet-switching transfer of data through the internet to first make a connection with the access point POP 6. This can be carried out through the exchange point 4 or even through a standing line 9 to the POP 6. The  
20 data are transferred line-switched up to the POP 6 and are preferably already packeted. If a change to line-switching data transfer is to take place then a line to another switch is switched through the exchange 4 and the data are transferred to this by line-switching. The switch 7a thus  
25 routes the IP switched/line-switched channels to the line 8 controlled by same so that they are more cost-effective or more real time depending on the wishes of the user or provider of the channels.

30 The switch 7a is integrated in the internet and connected to further IP switches 11 and/or line switches 12. Ideally the network still only consists of switches 7b which allow both line switching and packet switching, so that with each switch 7b there is the possibility where necessary of  
35 providing a higher quality line-switching transfer instead

of a packet-switching transfer. A line-switched transfer is thereby established as bypass, more particularly between switches where a data blockage builds up.

5 Figure 3 shows a telecommunications network wherein switches  
7 which allow a data transfer selectively by packet  
switching or by line switching form an Intranet within the  
internet. A real time communications possibility is thereby  
present between the switches 7. So that this is always  
10 possible additional real time communications channels exist  
between the switches 7. These are additional ISDN /PSTN  
connections or additional Intranet channels. A line  
switching connection (bypass) between the switches 7 can  
thus not only arise through the telephone network but also  
15 through separate channels.

Figure 4 shows diagrammatically the establishment of a  
switch 7 according to the invention. The switch 7 is part  
of both a packet-switching network (internet) and a line-  
20 switching network (telephone network), ie it is connected  
through lines to further network junctions to which it can  
transfer or receive line-switched or packet-switched data.

Data coming in through a data input 74 can have any source,  
25 more particularly come from an IP switch/router, a line-  
switch such as an exchange point or a telecommunications  
unit, from a LAN or from an end terminal 1, 2. The data  
input 74 has for this purpose in known way an ethernet  
interface, an analogue interface with A/D converter and an  
30 ISDN interface. In addition where applicable an ATM  
interface and an interface with a mobile phone network can  
also be provided. The ISDN networks are with incoming data  
8 bit long words which arrive on a multiplexed supply line  
of the switch 7.

The switch 7 has a known IP switch 72 which copies over incoming IP packets (switch of multi-byte packets) and forwards them in the internet to suitable switches according to the address of the packets. These relate to the known internet protocol IP/UDP and IP/TCP. A data compression device 721 is integrated as an option in the IP switch 72. For data compression reference is made to the international compressions standards developed for individual communications, more particularly the compression process according to ITU standard G. 72 X. Furthermore a coding device 722 for coding data packets can be provided as an option.

Furthermore the switch 7 has a line switching device 73. This has a digital coupling 731 which is known per se for switching through telephone conversation channels of the line-switching network and a multiplex/demultiplex device 732 which produces sub-channels on existing data channels, as will be described in further detail below.

The internal control commands, as to whether a packet switching is to take place through the IP switch or a line switching is to take place through the line switching device 73, are produced in a control device 71. The device 71 is substantially a switch which forwards the incoming data either as data packets to the IP switch 72 or as bit flow to the line switching device 73. To this end the control information of the incoming data are evaluated. The change-over control unit 711 monitors and controls which open connections are present (ie which and how many data channels are connected) and which band width the individual data channels require.

In detail the control device 71 has a change-over control unit 711, two packeting/unpacketing devices 713, 714 and an

intermediate register 712. The change-over control unit is connected to a topography data bank 75 which contains geographical data for a number of IP addresses.

- 5 If the incoming data are IP packets then the header of the IP packets is evaluated by the change-over control unit 711. If the incoming data are a continuous data stream then the signalling information of the signalling channel (in band signalling or outband signalling) are evaluated by the  
10 change-over control unit 711. The basic state thereby provides that the incoming data are sent into the internet through the IP switch 72. If the incoming data do not yet exist as IP packets then they are packeted into corresponding IP packets in the packeting/unpacketing device  
15 714 and sent to the IP switch.

- If the data exist as IP packets but are to be transferred line-switched through the line-switching device 73 then the data are where applicable unpacketed in the  
20 packeting/unpacketing device 713. More particularly the header of the data packets is removed. Unpacketing is however optional and not absolutely necessary since data packets can be transferred line-switched where applicable according to the protocol PPP. The (packeted or non-  
25 packeted) data are transferred as bit stream to the line switching device 73 by the change-over control unit 711.

- Through a control command which is sent by an end terminal or another switch and for example triggered by a user by  
30 pressing a certain button on the terminal or by the network management system, the type of communication is switched over to line-orientated or packet-orientated communication.

- A corresponding signalling command for changing between  
35 packet and line switching is for example represented by a

certain bit sequence wherein the switching unit 71 stores the detailed incoming data in an intermediate register 712 and compares it with stored bit sequences. If a certain bit sequence exists then a change over to a different type of switching is carried out. Alternatively it can also be possible for the change-over control device 711 to monitor the band width of a transfer and on understepping or exceeding a certain band width and/or in the event of a time delay when forwarding IP data packets to automatically release a control command to change over to the relevant other type of transfer.

To change from packet switching to line switching first at the command of the control unit 71 a connection is made via the line-switching unit 73 (bypass) with another switch (destination switch). To this end the ISDN signalling command SETUP is sent to the next exchange point. After the connection is established all the incoming data of the communications connection considered are no longer directed through the IP-switch 72 but through the line-switching unit 73. The data are now transferred by line-switching with fixed band width through the established bypass to the other switch.

The change-over control unit 711 thereby checks within the scope of the change-over process and prior to sending the data to the device 73 whether they are IP packets and whether unpacketing is to take place in the packeting/unpacketing device 713. The decision on this is made in dependence on control signals of the network management system or the end terminal or alternatively by the change-over control unit 711 itself in dependence on the data arrival. The control signals here contain corresponding transfer parameters. In each case the data after being sent to the device 73 are then exposed in the

coupling field 731 to an ISDN data frame.

To establish the most effective line-switching connection possible it is important to select a suitable destination  
5 switch where the bypass is established. To this end a switch is selected as destination switch which lies in a geographical area which coincides with the destination address of numerous IP packets. Then in particular these IP packets are transferred through the bypass to the  
10 corresponding destination switch so that the data packets still only have a short transfer path from the destination switch to the final destination.

The classification of the IP packets and selection of a  
15 corresponding destination switch takes place by means of the topology data bank 75 which contains a geographical link between a number of IP addresses and their geographical position. In the line switching device 73 the IP destination address of each packet is compared with the  
20 addresses stored in the data bank 75 and in the event of a successful association of the IP address this is given a code. This can be a number which characterises a certain geographical region. This code is recognized by the coupling field 731 and the data packet is then switched  
25 through to the corresponding destination switch.

Since it would result in too much time delay to interrogate the data bank 75 for each data packet the change-over control unit 711 contains a cache which can be quickly  
30 accessed and in which the result of the last data bank enquiry is stored. If the IP address of a data packet arriving through the data input 74 is stored in the cache then the corresponding code can be quickly given.

35 If the IP address is not contained in the cache then a data

bank enquiry is carried out and the IP packets are directed onto the IP switch 72 until the result of the data bank enquiry is provided. Only then is a change over made for this data to a line-switching transfer through a bypass. It is thereby possible that several bypasses to different destination switches exist at the same time whereby the change over control unit 711 controls the coupling field 731 so that the data packets are each time sent to the destination switch which is most favourable from the network topological point of view. The change-over control unit 711 thus informs the coupling field 731 of which data is to be sent to which destination switch.

If the destination address of a data packet is not contained in the data bank 75 then those intermediate junctions of the packet-switching network are checked to be fully functioning which are normally run through when sending data packets with a certain destination address. To this end the corresponding data are exchanged between the individual network junctions in known way by trace routing. At the appropriate intermediate junctions, ie the intermediate junctions with low functioning output, it is determined whether the ISDN number is known and this is requested where applicable. The change-over control unit 711 of the data bank 75 is thereby operated in the manner already described. A bypass is then established from the change-over control unit 711 to a switch which lies in the chain of switches as close as possible to the destination switch.

The multiplex/demultiplex device 732 of the line-switching device 73 allows in dependence on the control commands of the change-over control unit 711 a line-switching transfer to sub-channels with a band width which corresponds to a fraction of the usual band width of a data channel considered. Data channels are thereby bundled which are

formed or determined in the coupling field 731 according to the control commands of the change-over control unit 711. A time multiplex channel of the PCM 30 system is considered as ISDN data frame which has information of 30 data channels and two signal channels. The band width of the data channels each amounts to 64 kbit/s.

The multiplex/demultiplex device 732 allows a multiplexing inside each of the 30 data channels of the time multiplex channel. To this end two methods are alternatively used. In a first method only a part of the 8 bit of a PCM word is switched through each other, thus 1, 2 or 4 bit. The band width is reduced accordingly to 8, 16 or 32 kbit/s. The data of several channels are in this way multiplexed on one data channel.

Alternatively a PCM word (byte) of the time multiplex channel of the PCM 30 system is not switched through in each of the successive pulse frames, but only in each n-th pulse frame whereby the band width is reduced to  $64 \text{ kbit/s} / n$ .

The two multiplex methods described can also be combined. By way of example one band width of 1 kbit/s is produced for one data channel in that each eight bit in each eighth frame of the ongoing data channel stems from the data channel considered.

The switching through in the line switching device 731 takes place in dependence on the selected data rate and in the case of transfer rates per data channel unequal to 64 kbit/s includes the multiplex/demultiplex device 732. If no multiplexing takes place on a data channel then the data are passed by the multiplex/demultiplex device 732.

For the channel or sub-channel considered, a line-switching



transfer takes place to the switch which represents the other side of the line-switching connection until a control command again reaches the device 71 to switch over again to packet-switching. This command is in turn coded by a certain bit sequence or is produced automatically. Then through the control device the switched-through line is broken off and the incoming data are then again directed to the IP switch 72.

- 10 Figures 5a and 5b show the method sequence. Figure 5a shows the course of the method when changing from a packet-switching data transfer to a line-switching data transfer between two switches. With the presence of a corresponding control signal a line-switching connection is set up to another switch and the data sent by line-switching.

- If a line-switching data transfer is to take place to sub-channels of fixed band width then a multiplexer/demultiplexer is activated which multiplexes several data streams so that each time only each  $n^{\text{th}}$  bit and/or each  $n^{\text{th}}$  byte is reserved in the outgoing data stream for an incoming data stream. It can thereby be provided that the individual sub-channels have a different band width, ie the different input data streams have different proportions at the outgoing data stream. With the presence of a further control signal a change back to a packet-switching transfer is undertaken.

- Figure 5b shows the selection of a suitable switch when establishing a bypass. To this end the headers of the IP data packets are compared with the information of a data bank. If the header information is associated with a certain geographical destination then the bypass is established to a switch mounted in this geographical area. If the header information is not associated with a certain

5

10

CLAIMS:

1. Method for transferring data from a first switch to a second switch which are part of a line-switching network or have access to a line-switching network, selectively by line-switching or packet-switching, consisting of the following steps:

a) establishing a connection through the line-switching network from a first switch to an access point of a packet-switching network;

b) line-switching transfer of data from the first switch to the access point of the packet-switching network;

c) packeting of the data if this does not yet exist as data packets, and packet-switching transfer of the data packets through the packet-switching network from access point to the second switch;

d) repeated checks whether a control signal exists for establishing a line-switching connection with the second switch;

e) establishing a line-switching connection from first switch to second switch through the line-switching network with the presence of a corresponding control signal;

f) changing to a line-switching data transfer and transferring data to the second switch.

2. Method for transferring data from a first switch to a second switch which are both part of a line-switching network and a packet-switching network and have access to such network, selectively through line-switching or through packet-switching, consisting of the followings steps:

a) packeting the data in the first switch if the data does not yet exist as data packets;

b) packet-switching transfer of data packets through the packet-switching network to the second switch;

c) repeated checking whether a control signal exists

for establishing a line-switching connection with the second switch;

d) establishing a line-switching connection through the line-switching network to the second switch with the presence of a corresponding control signal;

f) change to a line-switching data transfer and transferring data to the second switch.

3. Method according to claim 1 or 2 wherein the data packets after changing to a line-switching data transfer remain as data packets and are transferred as such by line-switching.

4. Method according to claim 1 or 2 wherein the data packets after changing to a line-switching data transfer are unpacketed, more particularly the headers of the data packets are removed.

5. Method according to at least one of claims 1 , 3 or 4 wherein the same data channel is used to send the data packets to the access point to the packet-switching network and to transfer the data through the line-switching network to the second switch.

6. Method according to at least one of claims 1, 3 or 4 wherein the data packets are transferred to the access point to the packet-switching network through a first data channel and the data are transferred for line-switching to the second switch through a second data channel.

7. Method according to at least one of the preceding claims wherein the line-switching network represents an ISDN network with ISDN switches, the data packets have the format TCP/IP and the data channels used for line-switching data transfer represent ISDN B channels.

8. Method according to at least one of the preceding claims wherein the control signal which releases a change between the line-switching and packet-switching transfer on  
5 understepping or exceeding certain demands on the quality of the data transfer such as time delay or noise proportion, is produced automatically or as a result of a command of a network management system or an end appliance.

10 9. Method according to at least one of the preceding claims wherein with a line-switching data transfer between the first switch and the second switch or between the first switch and the access point to the packet-switching network the data of several users are multiplexed on one data  
15 channel by forming sub-channels of fixed band width.

10. Method according to claim 9 wherein the data of one user after its selection are transferred line-switched with a transfer rate which corresponds to a fraction of the  
20 transfer rate of the band width which is available as standard to the user.

11. Method according to claim 9 or 10 wherein the line-switched network is as ISDN network and the data of one user  
25 to be transferred are transferred between the switches or one switch and the access point to the packet-switching network on one data channel with a band width which corresponds to a fraction of the band width of 64 kbit/s which is available as standard, more particularly 32, 16, 8,  
30 4, 2 or 1 kbit/s.

12. Method according to claim 11 wherein in the switch only each  $n^{\text{th}}$  byte or each  $n^{\text{th}}$  bit of an ISDN frame is copied over and forwarded on the switched-through data channel to the  
35 next switch or to an access point to the packet-switching

network whereby the band width of the transfer is 64 kbit/s /n.

13. Method according to at least one of the preceding  
5 claims wherein with a change over from a packet-switching transfer to a line-switching transfer

- a) the address information of the data packets are evaluated and classified according to network topology;
- b) for the data packets whose destination addresses  
10 relate to the same topological area of the network a switch is selected which is located in this area;
- c) a line-switching connection (bypass) is established with the selected switch and
- d) the corresponding data or data packets are  
15 transferred line-switched to the switch.

14. Method according to claim 13 characterised in that to  
classify the data packets according to network topology the  
destination addresses of the data packets are sorted  
20 according to geographical areas whereby for data packets whose destination addresses relate to the same geographical area a switch is selected which is located in this geographical area and a line-switching connection is established with this switch.

25 15. Method according to claim 14 characterised in that for classifying the data packets according to geography the destination addresses are compared with destination addresses stored in a data bank whereby the data band  
30 contains a link between the destination addresses and the associated geographic situation.

16. Switch for use in a method according to claims 1 or 2  
with  
35 a) at least one packeting device (713, 714) for

b) an IP switching device (72) for routing data packets;

5

d) a control device (71) which directs incoming data either to the IP switching device (72) or to the line switching device (73) in dependence on control signals.

10 17. Switch according to claim 16 which has furthermore a  
topology data bank (75) which contains associations between  
destination addresses of data packets and associated  
geographical origin.

15 18. Switch according to claim 16 or 17 which contains  
furthermore a multiplexer (732) which with the presence of  
a corresponding control command multiplexes several data  
streams so that only each n-th bit and/or each n-th byte is  
used in the outgoing data channel.

20

19. Switch according to claim 18 wherein different input data streams occupy different sized proportions in the outgoing data channel.

25 20. Switch according to one of claims 16 to 19 which has in addition a device (721) for compressing and decompressing data.

1

The invention relates to a method for transferring data from a first switch to a second switch selectively by line-switching or by packet-switching as well as to a switch for carrying out the method. Data packets are thereby first transferred packet-switched through a packet-switching network to the second switch. With the presence of a corresponding control signal a line-switching connection is established from the first switch to the second switch and the data are then transferred through this connection. Where applicable a renewed change over to a packet-switching transfer is carried out. The invention allows a flexible packet-switching or line-switching data transfer linked with dynamic costs between the junctions of a telecommunications network and provides the conditions for a cost-effective data transfer with real time properties.



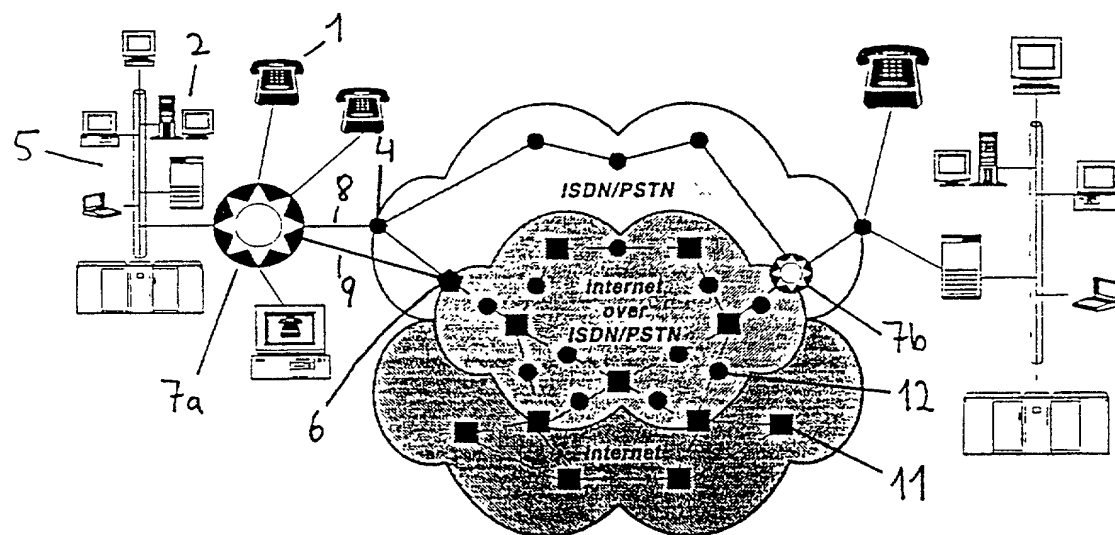


Fig. 1

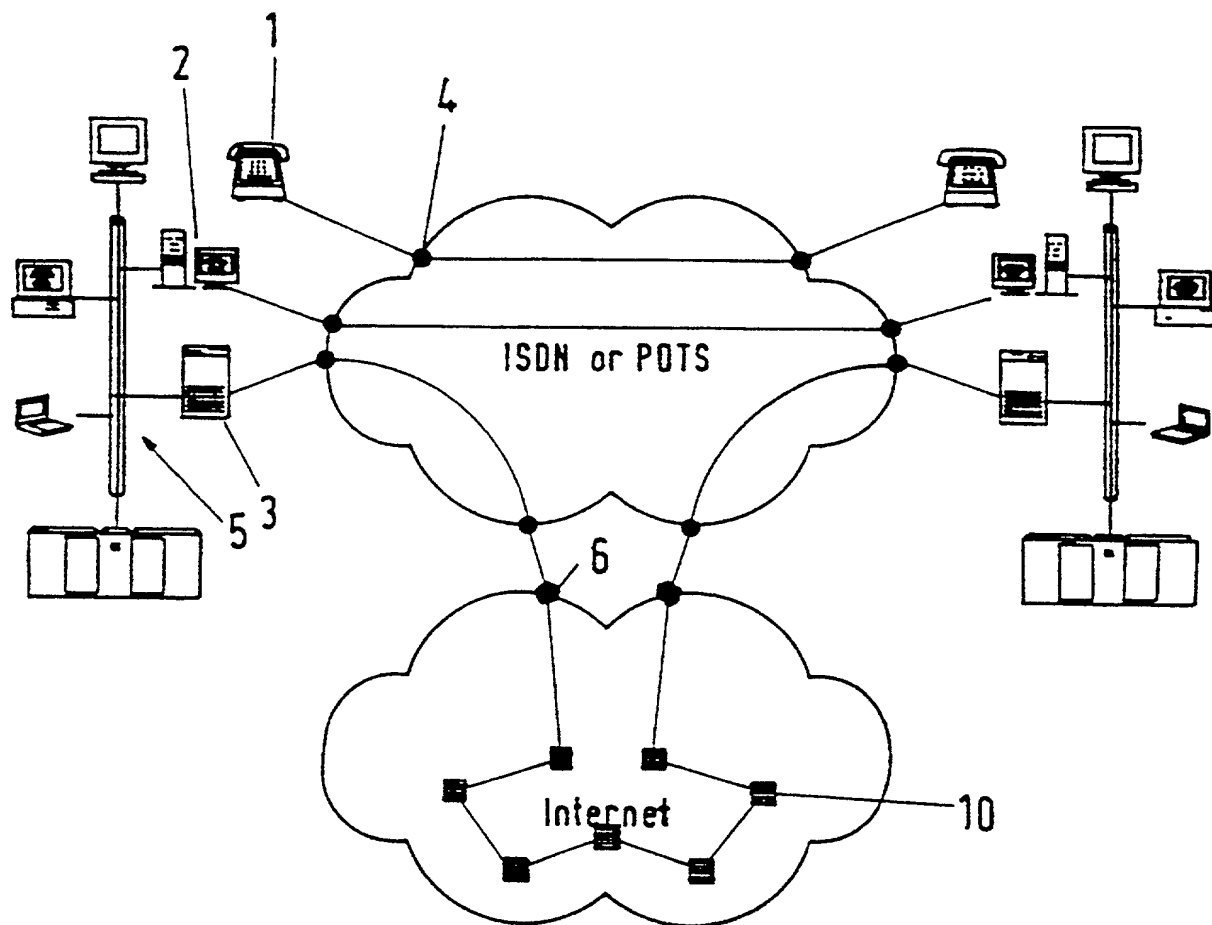


Fig.2

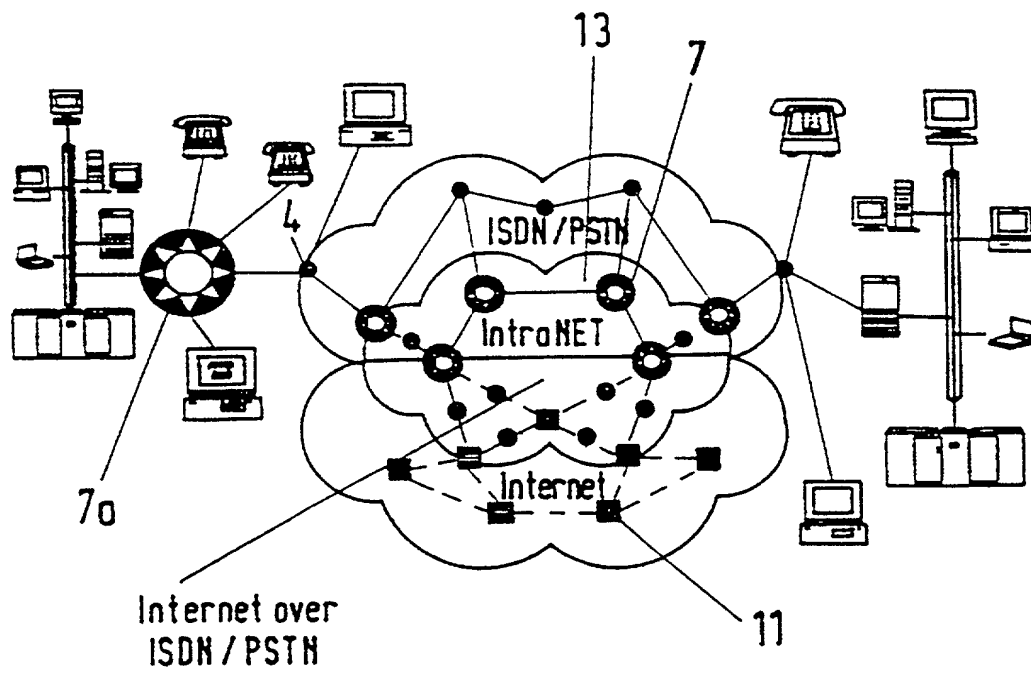


Fig.3

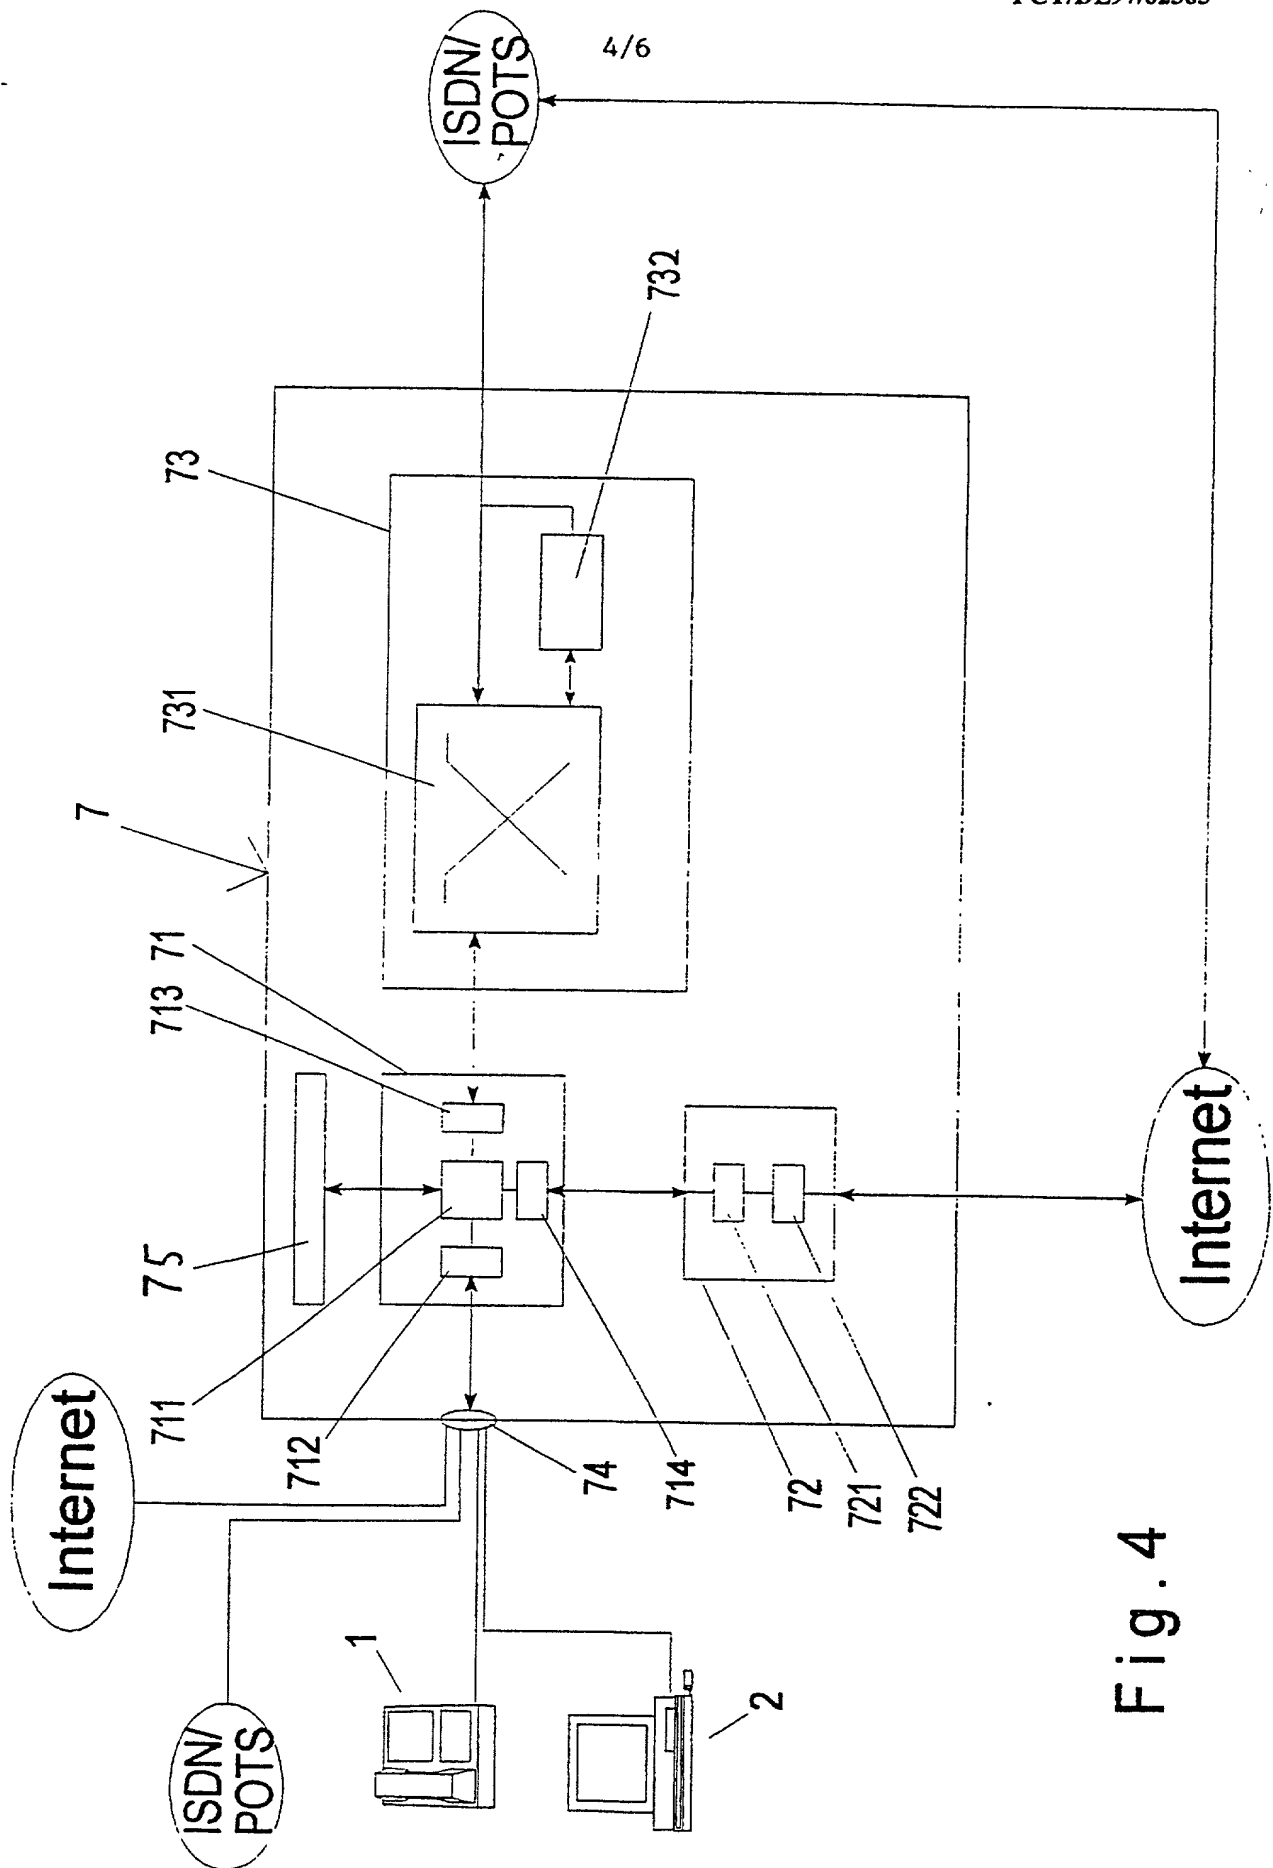


Fig. 4

5/6

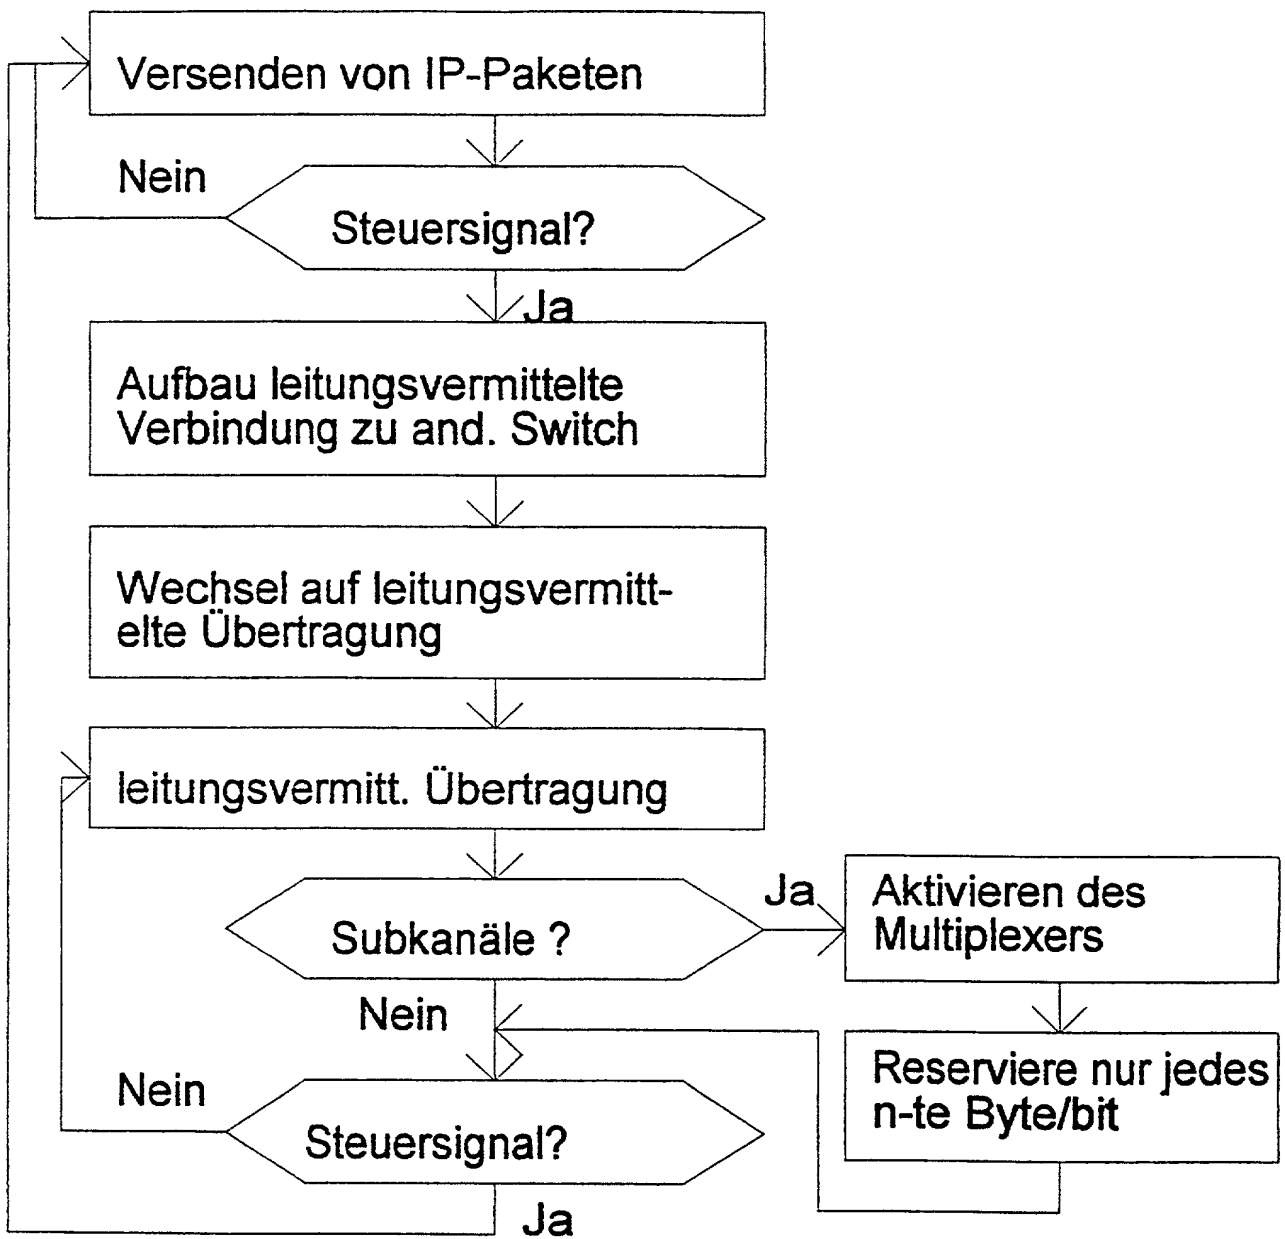


Fig. 5a

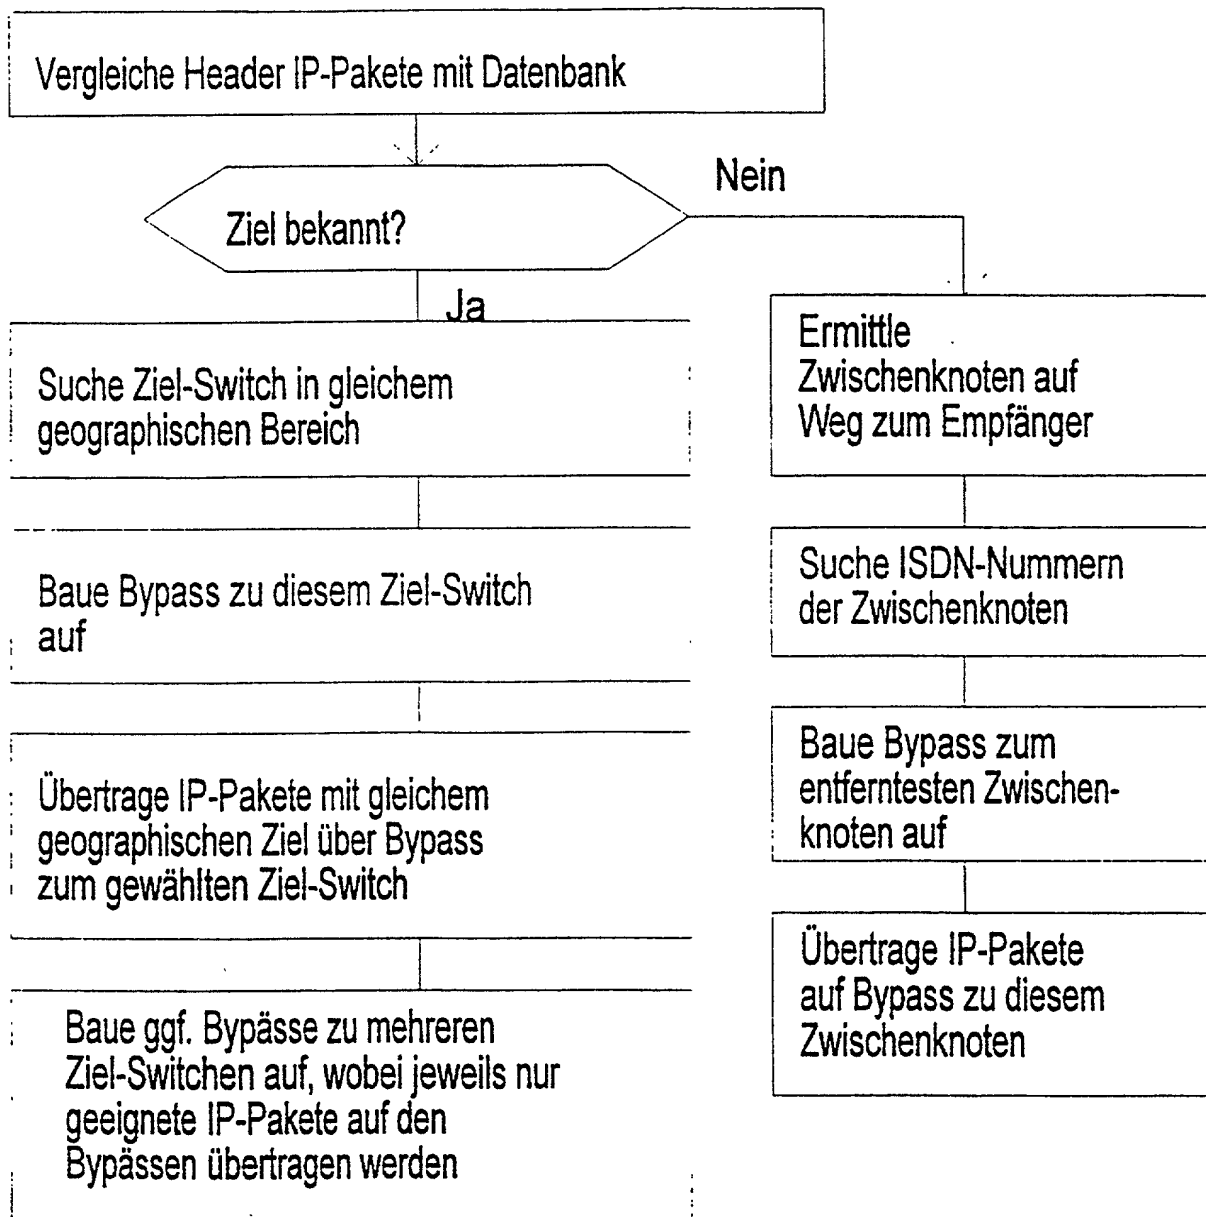


Fig. 5b

**DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATIONS**

**PATENT**

Docket No. : 34248/DBP/M521

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **METHOD FOR TRANSMITTING DATA IN A TELECOMMUNICATIONS NETWORK AND SWITCH FOR IMPLEMENTING SAID METHOD**, the specification of which is attached hereto unless the following is checked:

X was filed on 7-October-1997 as United States Application Number or PCT International Application Number PCT/DE97/02363 and was amended on 5-October-1998 and 30-October-1998 (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of the foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

<u>Application Number</u>	<u>Country</u>	<u>Filing Date (day/month/year)</u>	<u>Priority Claimed</u>
196 42 063.6	Germany	7-October-1996	Yes
196 45 368.2	Germany	23-October-1996	Yes

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

<u>Application Number</u>	<u>Filing Date</u>
---------------------------	--------------------

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

<u>Application Number</u>	<u>Filing Date</u>	<u>Patented/Pending/Abandoned</u>
---------------------------	--------------------	-----------------------------------

**POWER OF ATTORNEY:** I hereby appoint the following attorneys and agents of the law firm CHRISTIE, PARKER & HALE, LLP to prosecute this application and any international application under the Patent Cooperation Treaty based on it and to transact all business in the U.S. Patent and Trademark Office connected

**DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATIONS**

**Docket No. 34248/DBP/M521**

with either of them in accordance with instructions from the assignee of the entire interest in this application; or from the first or sole inventor named below in the event the application is not assigned; or from Maikowski & Ninnemann in the event the power granted herein is for an application filed on behalf of a foreign attorney or agent.

R. W. Johnston	(17,968)	Edward R. Schwartz	(31,135)	Molly A. Holman	(40,022)
D. Bruce Prout	(20,958)	John D. Carpenter	(34,133)	Lucinda G. Auciello	(42,270)
Hayden A. Carney	(22,653)	David A. Plumley	(37,208)	Norman E. Carte	(30,455)
Richard J. Ward, Jr.	(24,187)	Wesley W. Monroe	(39,778)	Joel A. Kauth	(41,886)
Russell R. Palmer, Jr.	(22,994)	Grant T. Langton	(39,739)	Patrick Y. Ikehara	(42,681)
LeRoy T. Rahn	(20,356)	Constantine Marantidis	(39,759)	Mark Garscia	(31,953)
Richard D. Seibel	(22,134)	John W. Eldredge	(37,613)	Gary J. Nelson	(P-44,257)
Walter G. Maxwell	(25,355)	Gregory S. Lampert	(35,581)	Raymond R. Tabandeh	(43,945)
William P. Christie	(29,371)	Craig A. Gelfound	(41,032)	Phuong-Quan Hoang	(41,839)
David A. Dillard	(30,831)	Syed A. Hasan	(41,057)	Jun-Young E. Jeon	(P-43,693)
Thomas J. Daly	(32,213)	Kathleen M. Oister	(42,052)		
Vincent G. Gioia	(19,959)	Daniel M. Cavanagh	(41,661)		

The authority under this Power of Attorney of each person named above shall automatically terminate and be revoked upon such person ceasing to be a member or associate of or of counsel to that law firm.

**DIRECT TELEPHONE CALLS TO :** D. Bruce Prout, 626/795-9900

**SEND CORRESPONDENCE TO :** CHRISTIE, PARKER & HALE, LLP  
P.O. Box 7068, Pasadena, CA 91109-7068

I declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1-00

Full name of sole or first joint inventor <u>Sigam SCHINDLER</u>	Inventor's signature <i>Schindler</i>	Date <u>17-3-99</u>
Residence and Post Office Address <u>Am Sandwerder 36, 14109 Berlin, Germany</u> <u>DEX</u>		Citizenship <u>German</u>

Full name of second joint inventor <u>Andreas ILLG</u> <u>2-00</u>	Inventor's signature <i>Andreas Illg</i>	Date <u>17-3-99</u>
Residence and Post Office Address <u>Zwinglistraße 23, 10555 Berlin, Germany</u> <u>DEX</u>		Citizenship <u>German</u>

Full name of third joint inventor <u>Karsten LÜDTKE</u> <u>3-00</u>	Inventor's signature <i>Karsten Lüdtke</i>	Date <u>17-Mar-99</u>
Residence and Post Office Address <u>Karl-Stieler-Straße 16, 12167 Berlin, Germany</u> <u>DEX</u>		Citizenship <u>German</u>



---

**DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATIONS**

---

**Docket No. 34248/DBP/M521**

---

Full name of fourth joint inventor <b>Frank PAETSCH</b> 4-00	Inventor's signature <i>F. Paetsch</i>	Date 17-Mar-99
Residence and Post Office Address Brachvogelstraße 4, 10961 Berlin, Germany DEX		Citizenship German

SFC PAS176570.1-3269 9:11 am

DECLARATION